

GNE GREAT NORTHERN EQUIPMENT

2018



NATIONAL

CATALOG



LARGE ON-HAND
70,000+ SQ. FT.
INVENTORY

SERVING THE
FOLLOWING INDUSTRIES:

AGRICULTURE, COMMERCIAL,
HARDWARE, LAWN & GARDEN, RENTAL



BRAVE
A GNE BRAND

DOSKO
A GNE BRAND




IRON & OAK
A GNE BRAND

Jrco
Heavy-duty Attachments
for Commercial Mowers
A GNE BRAND

MAXIM
A GNE BRAND

(800) 822-0295 | GNEDI.COM

ADVANTAGES OF WORKING WITH GNE

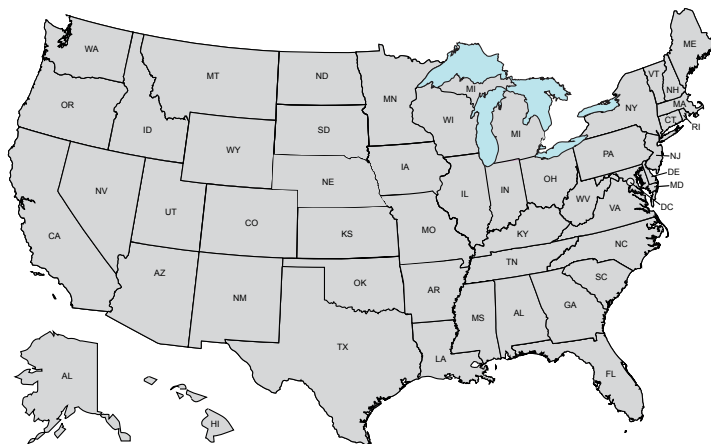

Established 40 years ago, GNE is a diverse company that manufactures and distributes top quality equipment. We realize you need to find economical solutions and be innovative to find profitable avenues for all. Our national distribution area covers all 50 states. We provide quality products and trusted brands to the hardware, lawn and garden, rental, agriculture and power equipment industries.



www.facebook.com/GreatNorthernEquipment



www.twitter.com/GNEquip



BECOME A DEALER

- Represent additional product lines
- Increase your market share/profits

**Qualifying initial stocking order must be placed according to dealer program*



FREIGHT PROGRAMS

- We'll assist in customizing your order to fit the most units on a pallet to conserve freight
- Flat fee shipping rates now available
- Same day shipping on in-stock parts when you place your order by 2 p.m.



GNE is formed, originally selling Honda engines and then expanding to include commercial quality power equipment.

1978

GNE is established as a business corporation and continues serving the Midwest states of MN, ND, SD, IA and WI.

1987

CONTENTS

ACCEL

Grease	61
Motor Oils	61

APACHE

Hoses	62
Pump Accessories	62

BANJO

Centrifugal Pump Only Kits	5
Cast Iron Transfer Pumps	5
Poly Transfer Pumps	5

BRAVE

Blowers	7
Brush Cutters	20
Crack Cleaners	7
Earth Augers	7, 18-19
Edgers	7, 20
Floor Strippers	7
Generators	11
Hydraulic Power Packs	21
Log Splitters & Accessories	8-10
Pressure Washers & Accessories ..	14-17
Pumps	11
Skid Steer Plate Display	21
Trenchers	12-13
Wire Installation System	20

CEI

Chipper Knives	28
Stump Grinder Bolts	28
Stump Grinder Pockets	23-27
Stump Grinder Teeth	23-28
Stump Grinder Wheels	27

DOSKO

Brush Chipper & Accessories	32
Stump Grinders & Accessories	30-31

DRAINZIT

Oil Changing Aids	34
-------------------------	----

GDI

Meters	60
--------------	----

INDUSTRIAL AIR

Air Compressors	36-38
-----------------------	-------

IRON & OAK

Log Splitters & Accessories	40-42
-----------------------------------	-------

JRCO

Aerators	45, 48
Blower Buggy Carrier	46
Broadcast Spreaders	44
Dethatchers	44
Lawn Rollers	48
Leaf Blade Plow	46
Sprayers	47
Transporter	47

K&M

Jack	61
------------	----

KINDLING CRACKER

Kindling Splitter	50
-------------------------	----

MAG 1

Hydraulic Fluid	61
-----------------------	----

MAXIM

Aerators	58
Cultivator	53
Lawn Rollers	58
Plows	56-57
Sprinklers	57
Trimmers	57
Tillers	52-55

GROWTH AT GNE

In February, GNE purchases the assets of Dosko, a tree care equipment line. Production is moved from California to Minnesota. **In March**, GNE also acquired K&M Manufacturing, an agricultural aftermarket parts supplier.

2010

In June, GNE purchases the assets of Brave and Iron & Oak log splitter equipment lines. Production is moved from Illinois to Minnesota. The Brave product offering grows.

2012

2013

In February, GNE purchases the assets of Maxim Manufacturing Corporation, a line of lawn and garden equipment. Production is gradually moved from Mississippi to Minnesota.

2015

2016

In February, GNE purchases CEI and Perma-Wrap™. These lines bring the first e-commerce websites to GNE.

In June, GNE purchases JRCO, a line of heavy-duty attachments for commercial mowers. Production is moved to GNE's nearby Rogers, Minn. facility.

GNE

BANJO



**PUMP KITS
TRANSFER PUMPS**



DESIGNED FOR AG OR INDUSTRIAL APPLICATIONS

APACHE

SEE PUMP ACCESSORIES ON PAGE 62



POLY TRANSFER PUMPS POWERED BY HONDA

- High strength polypropylene
- Self-priming
- Corrosion resistant
- Lightweight – portable
- High performance impellers

POWERED BY
HONDA



205PH-5-GC



205PH-5-160E



300PH-6-200

ITEM #	ENGINE	OIL ALERT	CAPACITY	START	GPM	IMPELLER	SEALS	WEIGHT	RETAIL
205PB-127	Briggs 550 Series, 127cc	No	2"	Recoil	190	5-Vane	EPDM	50 lbs	\$329
205PH-5-GC	Honda GC160, 160cc	No	2"	Recoil	190	5-Vane	EPDM	50 lbs	\$429
205PH-5-160	Honda GX160, 163cc	Yes	2"	Recoil	190	5-Vane	EPDM	50 lbs	\$559
205PH-5-160E	Honda GX160, 163cc	Yes	2"	Electric	190	5-Vane	EPDM	58 lbs	\$799
215PH-5-160	Honda GX160, 163cc	Yes	2"	Recoil	190	5-Vane	Viton	50 lbs	\$579
M-225PH-6-200	Honda GX200, 196cc	Yes	2"	Recoil	190	5-Vane	EPDM	50 lbs	\$629
205PH-6-200	Honda GX200, 196cc	Yes	2"	Recoil	190	5-Vane	EPDM	50 lbs	\$579
205PH-6-200E	Honda GX200, 196cc	Yes	2"	Electric	190	5-Vane	EPDM	58 lbs	\$899
300PH-6-200	Honda GX200, 196cc	Yes	3"	Recoil	300	4-Vane	EPDM	50 lbs	\$659
300PH-6-200E	Honda GX200, 196cc	Yes	3"	Electric	300	4-Vane	EPDM	58 lbs	\$959

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
FP205P-01	Base Plate, Aluminum	\$69

CAST IRON TRANSFER PUMPS POWERED BY HONDA

- Cast iron construction for rugged dependability
- Self-priming
- Stainless steel shaft sleeve to protect engine shaft
- High performance impellers



POWERED BY
HONDA



222PIH5



222PIH6

ITEM #	ENGINE	OIL ALERT	CAPACITY	START	GPM	IMPELLER	SEALS	WEIGHT	RETAIL
222PIH5	Honda GX160, 163cc	Yes	2"	Recoil	190	5-Vane	EPDM	148 lbs	\$849
222PIH6	Honda GX200, 196cc	Yes	2"	Recoil	300	5-Vane	EPDM	148 lbs	\$889

PUMP ONLY KITS CENTRIFUGAL

- Cast iron or polypropylene construction
- Self-priming
- Stainless steel shaft sleeve to protect engine shaft
- High performance impellers



205PO.BAN



225POI.BAN

ITEM #	MATERIAL	CAPACITY	IMPELLER	SEALS	WEIGHT	RETAIL
205PO	Polypropylene	2"	5-Vane	EPDM	10 lbs	\$199
215PO	Polypropylene	2"	5-Vane	Viton	10 lbs	\$219
300PO	Polypropylene	3"	4-Vane	EPDM	25 lbs	\$329
222POI	Cast Iron	2"	5-Vane	EPDM	60 lbs	\$589
225POI*	Cast Iron	2"	5-Vane (Trimmed)	Viton	60 lbs	\$599

*Recommended for use with 10 lbs per gallon material or more

BANJO

AVAILABLE NATIONWIDE

GNE

BRAVE

BRAVE

A GNE BRAND

BLOWERS
BRUSH CUTTERS
EARTH AUGERS
EDGERS
FLOOR STRIPPERS
GENERATORS
LOG SPLITTERS
PRESSURE WASHERS
PUMPS
TRENCHERS
WIRE INSTALLATION SYSTEM




COMING SOON!

New for
2018
— COMING SOON —

BRAVE

AVAILABLE NATIONWIDE



◀ Augers

- Towable and additional two-man earth augers
- 154-276 ft lbs maximum drilling torque (model dependent)
- 1" round or 1-3/8" hexagon driveshaft connection (model dependent)



◀ Blowers

- Ideal for commercial and homeowner use
- Walk-behind, tow-behind or zero-turn mower mount blowers options



◀ Crack Cleaner

- Honda GX120 engine
- Removes debris quickly with smooth blade engagement, belt tension and depth control
- Steel spindle head



◀ Edger

- Honda GX120 engine
- Efficient edging with smooth blade engagement, belt tension and depth control
- Steel cutter head



◀ Floor Strippers

- 3 models
- Electric motors
- Removes ceramic tile, hardwood flooring and other materials from cement surfaces for commercial or DIY projects

BRAVE

A GNE BRAND



COMMERCIAL FEATURES AT AN AFFORDABLE PRICE

These log splitters are packed with features including a high performance wedge, 4-stage hydraulic filtration system, log cradle, log dislodger and Honda engine. They are built to withstand heavy use and keep on running for years to come.

Nylon Hose Sleeve

A nylon hydraulic hose sleeve comes standard and provides protection from abrasive wear, sunlight and accidental spray from pinhole leaks

Lift Handle

Convenient lift handle provides added control for easier and safer transitions between the horizontal and vertical operating positions

Log Dislodger

Heavy-duty log dislodger ejects logs that stick to the splitting wedge protecting the control valve and other hydraulic components from damage



4-Stage Hydraulic Filtration System

Filtration system prevents damage to the hydraulic system by removing metal particles and other micro particles that can contaminate and damage the machine (components include suction strainer, return line filter, breather cap air filter and magnetic drain plug)

Log Cradle

Cradle catches split logs and serves as a work table for large logs

I-Beam

Full, industrial I-beam construction for incredible strength

TACKLE THE TOUGHEST OF WOODS WITH EASE

The industrial I-beam provides added strength to prevent twisting. Change between the horizontal and vertical operating positions in seconds. For heavy logs, utilize the vertical operating position and split without lifting a log. A two-stage pump delivers the same amount of pressure as a single-stage pump, but with less horsepower and a Honda engine means it starts quickly time and time again for lasting reliability.

BRAVEPRO



Log Splitter Features:

- Unique high performance wedge design makes splitting easier and more efficient
- Easily change from horizontal to vertical operating positions in seconds
- Industrial cylinder with Halite seals keeps constant and consistent pressure while splitting
- O-ring fittings on control valve make assembly easier and reduce leaks
- Two-stage pump to handle even the toughest jobs
- Manual tube keeps owner's manual handy
- Sherwin-Williams powder coat paint to withstand heavy use and weather elements
- Tow-ready with 2" ball hitch and chains
- Highway-rated tires
- Optional fenders and engine guard

		Brave Consumer Series		BravePro Prosumer Series
ITEM NUMBER		VH1724GC	VH1730GC	VH1737GX
RETAIL		\$1,649	\$1,899	\$2,199
ENGINE	Model	Honda GC160	Honda GC190	Honda GX270
	Displacement	160 cc	189 cc	270 cc
	Fuel Capacity	0.5 gallons	0.5 gallons	1.4 gallons
	Low Oil Shutdown	N/A	N/A	Standard
PUMP	Type	Two-Stage	Two-Stage	Two-Stage
	Flow (GPM)	11	13	16
FRAME	Dimensions	83" L x 41" W x 39" H	83" L x 41" W x 41" H	83" L x 41" W x 41" H
	Bed Height	28"	30"	30"
	Machine Weight	500 lbs	525 lbs	550 lbs
OPERATION	Wedge Height	8"	8"	8"
	Auto Return	Yes	Yes	Yes
	Maximum Log Length	25"	25"	25"
	Maximum Log Diameter	16"	16"	16"
	Cycle Time	13 seconds	14 seconds	14 seconds
CYLINDER	Hydraulic Tank Capacity	7 gallons	7 gallons	7 gallons
	Hydraulic System Capacity	8 gallons	8.5 gallons	9 gallons
	Cylinder Diameter	4"	4.5"	5"
	Cylinder Length	24"	24"	24"
WHEELS	Fenders	Optional	Optional	Optional
	Maximum Towing Speed	45 MPH	45 MPH	45 MPH
WARRANTY		2-year (Consumer) / 90 Day (Commercial) Limited Warranty	2-year (Consumer) / 90 Day (Commercial) Limited Warranty	2-year (Consumer) / 1-year (Commercial) Limited Warranty

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
795172	Engine Guard	\$70
795171	Fender Kit	\$105
GNE-1100-CVR	Universal Log Splitter Cover (See more details on page 60.)	\$90



795172



795171



GNE-1100-CVR

DUAL ACTION LOG SPLITTER 20 TON SPLITTING FORCE

- Horizontal operation
- Splits on both the forward and reverse stroke to split twice as fast as traditional splitters
- Horizontal operation
- Full size log table prevents logs from rolling off once split
- 8" carbon steel wedge has two tapered edges to allow easier splitting in both directions
- Clevis cylinder with 1.75" rod
- 11 GPM, horizontal, two-stage pump
- 3.0 gallon hydraulic tank
- Adjustable jack stand with 2" ball hitch and safety chains
- Powder coat finish for added durability
- 2-year (consumer) / 1-year (commercial) limited warranty



**SPLITS
BOTH
WAYS**



POWERED by
HONDA

ITEM #	ENGINE	CYCLE TIME	MAXIMUM LOG LENGTH	CYLINDER SIZE	WEIGHT	RETAIL
PCLS2013GC	160cc Honda GC	7 seconds	24"	4" x 24"	360 lbs	\$1,499



DUAL ACTION, 3-POINT TRACTOR MOUNT SPLITTERS UP TO 20 TON SPLITTING FORCE

- Horizontal operation
- Splits on both the forward and reverse stroke to split twice as fast as traditional splitters
- Full size log table prevents logs from rolling off once split
- 6" (TMH1315) or 8" (TMH2015) carbon steel wedge has two tapered edges to allow easier splitting in both directions
- Clevis cylinder with 1.75" rod
- Attaches to Category 1 tractor, 3-point hitch
- 1.5 gallon (TMH1315) or 2.0 gallon (TMH2015) hydraulic capacity (cylinders & hoses)
- Uses tractor's hydraulics to operate the cylinder
(hydraulic hoses connecting log splitter valve to tractor not included)
- Powder coat finish for added durability
- 43" x 34" x 20" (TMH1315)
- 46" x 34" x 22" (TMH2015)
- 2-year (consumer) / 1-year (commercial) limited warranty

**SPLITS
BOTH
WAYS**



TMH2015

Display Stand
Call for Details



ITEM #	SPLITTING FORCE	CYCLE TIME	MAXIMUM LOG LENGTH	CYLINDER SIZE	WEIGHT	RETAIL
TMH1315	Up to 13 Tons*	10 seconds @ 3 GPM	19"	3" x 18"	143 lbs	\$999
TMH2015	Up to 20 Tons*	7 seconds @ 11 GPM	25"	4" x 24"	293 lbs	\$1,199

*Dependent on tractor's hydraulic pressure.

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
TMH 10' HOSE KIT	10' Hydraulic Hose Kit	\$119

NEW

GENERATORS

HONDA-POWERED

- Digital CDI ignition offers excellent starting and high-power output
- Top of the line, 100% copper wound head with low THD, making it safe to use with sensitive equipment
- A full roll cage with anti-rip mounts prevent damage if tipped
- Solid base prevents grass, dirt and dust from getting into engine and alternator
- Vibration isolation mounts with inter-locking anti-rip brackets for optimal support
- Optional wheel kit adds convenient portability
- **Battery not included with electric start models**



BRPG5500


POWERED by
HONDA

BRPG8000ES

ITEM #	ENGINE	WATTAGE	MAX AC OUTPUT	RATED AC OUTPUT	NOISE RATING	FUEL CAPACITY	RUN TIME/TANK (AT 50% LOAD)	WEIGHT	RETAIL
BRPG5500	Honda GX270	5500	56.5-63.3 Hz	4500W	73 dB	6.5 Gallons	14.5 Hours	174 lbs	\$1,199
BRPG8000	Honda GX390	8000	56.5-63.3 Hz	6600W	74.5 dB	6.5 Gallons	10 Hours	200 lbs	\$1,699
BRPG8000ES	Honda GX390 (Electric Start)	8000	56.5-63.3 Hz	6600W	74.5 dB	6.5 Gallons	10 Hours	206 lbs	\$2,199
BRPG13000ES	Honda GX630 (Electric Start)	13000	56.5-63.3 Hz	10500W	79 dB	11 Gallons	10 Hours	313 lbs	\$2,799



BRPGWK1



BRPGWK2

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
BRPGWK1	Wheel Kit (Fits BRPG5500, BRPG8000, BRPG800ES)	\$129
BRPGWK2	Wheel Kit (Fits BRPG13000ES)	\$129


WATER PUMPS

SEMI-TRASH AND TRASH

- Aluminum housing
- Durable cast iron impeller and diffuser for long life
- Semi-trash pump can handle solid particles in suspension up to 3/8" diameter
- Trash pump can handle solid particles in suspension up to 1-1/8" diameter
- All models come with a basket strainer and hose adapters
- EPDM mechanical seal and inlet valve for longevity and reliability in dewatering applications
- Available in 2" and 3" models to fit common hose sizes (NPT inlet/outlet)
- **Suitable for flood water removal, lawn and garden watering and pond filling**



BRP160SP2

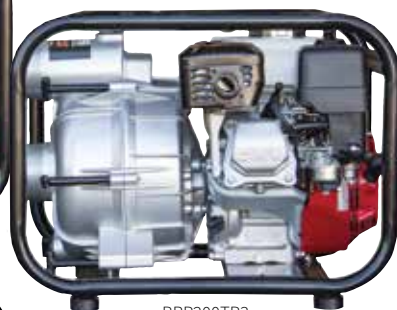POWERED by
HONDA

BRP200TP3

ITEM #	ENGINE	TYPE	MAX GPM	MAX PSI	PORT SIZE	WEIGHT	RETAIL
BRP160SP2	163cc Honda GX160	Semi-Trash	147	50	2" x 2" NPT	54 lbs	\$499
BRP160SP3	163cc Honda GX160	Semi-Trash	259	50	3" x 3" NPT	57 lbs	\$569
BRP200TP3	196cc Honda GX200	Trash	272	50	3" x 3" NPT	83 lbs	\$899

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
BRHK2	2" Transfer Pump Hose Kit w/ Quick Connect Couplers (Includes: 20' Green Suction, 50' Blue PVC Discharge, Two 2" Male Adapters (Part A, Aluminum), 2" Plated Steel 3/8" Round Hole Strainer)	\$135
BRHK3	3" Transfer Pump Hose Kit w/ Quick Connect Couplers (Includes: 20' Green Suction, 50' Blue PVC Discharge, Two 3" Male Adapters (Part A, Aluminum), 3" Plated Steel 3/8" Round Hole Strainer)	\$210

TRENCHER WALK-BEHIND

- Simplified operator controls make the trencher more user-friendly and less intimidating
- Trench anywhere with narrow design that allows you to get close to walls and fences
- A ratchet mechanism on the wheels helps prevent the machine from pulling away from the trenching direction
- Built-in lift handles make transport easy
- Tapered roller bearings and double-row ball bearings for trouble-free service
- Carbide tipped shark teeth chain
- Powder coated steel construction
- Optional trencher carrier available (*see below*)
- 60" x 24" x 41"



POWERED by
HONDA

ITEM #	ENGINE	TRENCH DEPTH	TRENCH WIDTH	MAX CHAIN SPEED	WEIGHT	RETAIL
BRPT	160cc Honda GX160	18"	3"	180' per minute	230 lbs	\$2,735

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
BRTC2	Trencher Carrier	\$367

NEW

MINI-TRENCHER WALK-BEHIND

- Fully enclosed rotors for increased safety
- Low profile design delivers maximum stability
- A standard clay hood reduces soil build-up
- Clutch lever cuts power to the rotor for safety
- Easy rotor changes with removal of a single nut
- Steel wheels with pneumatic tires for durability against wear
- 3 handlebar positions for operator comfort and control
- Used for a variety of applications including burying cable or pipe, pruning roots, removing stumps, installing invisible dog fences, installing sprinkler systems, defining landscape beds and installing edging
- Standard with 7" x 2", 3 point rotor (Item #702-133)
- Additional rotors available (*see next page*)
- 54" x 28" x 35"



POWERED by
HONDA

ITEM #	ENGINE	TRENCH DEPTH	TRENCH WIDTH	MAX CHAIN SPEED	WEIGHT	RETAIL
BRPT704H	196cc Honda GX200	7"	2"	20' per minute	140 lbs	\$2,235

NEW

BED SCULPTOR WALK-BEHIND TRENCHER/EDGER

- Neatly piles excavated dirt in an easy to back-fill pile right next to the trench
- Positive steering mechanism provides smooth curves
- Interchangeable rotors provide unmatched versatility for landscaping or trenching operations
- Double belt and pulley drive system
- Tungsten carbide rotor points
- Minimal turf damage
- Standard with 3", 4" or 5" bed edging rotor (Item #702-93, 702-89 or 702-106)
- Additional rotors available (*see next page*)



POWERED by
HONDA

ITEM #	ENGINE	ROTOR (STD)	TRENCH DEPTH	TRENCH WIDTH	MAX SPEED	WEIGHT	RETAIL
BRPT9SH3	270cc Honda GX270	3"	Up to 9"	1/2" to 9"	30' per minute	175 lbs	\$3,460
BRPT9SH4	270cc Honda GX270	4"	Up to 9"	1/2" to 9"	30' per minute	175 lbs	\$3,460
BRPT9SH5	270cc Honda GX270	5"	Up to 9"	1/2" to 9"	30' per minute	175 lbs	\$3,460

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
702-81	Clay Rotor: 3" x 1" Depth, 2 Points	\$100
702-82	Clay Rotor: 4" x 1" Depth, 2 Points	\$101
702-82A	Clay Rotor: 5" x 1" Depth, 2 Points	\$102
702-87	Clay Rotor: 7" x 1" Depth, 2 Points	\$106
702-130	Clay Rotor: 3" x 2" Depth, 3 Points	\$118
702-131	Clay Rotor: 4" x 2" Depth, 3 Points	\$118
702-132	Clay Rotor: 5" x 2" Depth, 3 Points	\$122
702-133	Clay Rotor: 7" x 2" Depth, 3 Points	\$122
702-135	Clay Rotor: 5" x 1-3/8" Depth, 3 Points	\$122
702-134	Clay Rotor: 7" x 1-3/8" Depth, 3 Points	\$122
702-93	Clay Rotor: 3" Bed Sculptor	\$190
702-89	Clay Rotor: 4" Bed Sculptor	\$190
702-106	Clay Rotor: 5" Bed Sculptor	\$190
702-113	Clay Rotor: 2" x 9" Curbing Rotor	\$206
702-112	Clay Rotor: 4-1/2" x 4-1/2" Rain Drain	\$174
702-93R	Clay Rotor: Redefining	\$160
702-100	Clay Rotor: Stump Removal	\$194
702-85	Rock Rotor: 4" x 1-1/2" Depth, No Points	\$136
702-58	Rock Rotor: 5" x 1-1/2" Depth, No Points	\$136
12-37	Rock Rotor: 7" x 1-1/2" Depth, No Points	\$142
702-92	Root Pruner Rotor: 3" x 1-1/2" Depth, 2 Points at Each End	\$79
702-90	Root Pruner Rotor: 4" x 1/2" Depth, 2 Points at Each End	\$81
12-41A	Root Pruner Rotor: 5" x 1-1/2" Depth, 2 Points at Each End	\$83
12-41	Root Pruner Rotor: 7" x 1-1/2" Depth, 2 Points at Each End	\$83



Clay Rotors (2 or 3 Point)

Used for burying wires, cable or edging (plastic, steel or other materials). The 3 point rotor is also used for installing sprinkler systems.



Rain Drain Rotor

Used to bury 4" drain line in order to divert water from gutter downspouts away from the house. Can also be used for installing block or brick edging.



Rock Rotors

Used for areas of heavy, scattered rock conditions. Requires 4 replaceable tungsten carbide rock points for operation (*sold separately*). Trenches 1-1/2" wide by 4", 5" or 7" deep.



Root Pruner Rotors

Used for pruning roots close to sidewalks, driveways, cart paths or other paved areas, preventing concrete damage. Also used for installing electronic dog fencing, and burying irrigation control wires or lines for low voltage lighting.



Bed Sculptor Rotors

Use different sized rotors to dig 3", 4" or 5" deep and slopes 6" to 8" back into bed. The 3" is designed for bed defining and the 4" and 5" are designed for installing steel, plastic or other edging materials.



Re-Defining Rotor

Used for redefining beds. Trenches 3" deep and slopes into the bed 3". Designed as Bed Sculptor alternative for existing beds. Costs less, digs faster and requires less clean up.



Stump Removal Rotor

Used to remove small stumps up to 3-1/2" below the ground surface and no higher than 6" above the ground. May also be used for removing large surface roots.



Curbing Rotor

Used to prepare the bed for a concrete curbing machine. It digs a 2" deep by 9" wide trench.



Trench Profile



Trench Profile



Trench Profile



Trench Profile

BRAVE

A GNE BRAND

GET READY TO TACKLE DIRT AND GRIME WITH EASE – PRESSURE WASHERS BUILT FOR THE HOMEOWNER

*With Brave's large line-up of cold water pressure washers, you'll find a model to fit your needs.
All units are electric or Honda-powered for performance and reliability.
Hot water/steam models also available – see page 16.*





BRAVE

Pressure Washer Features:

- Gas or electric powered
- Color-coded, quick-connect nozzles make nozzle changes easy
- Powder coated steel carts
- Clean houses/buildings, driveways, sidewalks, vehicles, decks, boats, tractors, equipment and more


BRAVEPRO

Pressure Washer Upgrades:

- Honda GX commercial engines
- Additional nozzle sizes

Brave Consumer Series					BravePro Prosumer Series			
ITEM NUMBER		BR1517ECO	BR2528HCO	BR2530HCO	BRP2530HCA	BRP3033HCA	BRP3540HCA	BRP4030HAR
RETAIL		\$600	\$500	\$580	\$900	\$1,100	\$1,450	\$1,300
ENGINE	Model	120-Volt Electric* (15 Amp)	Honda GC160	Honda GC190	Honda GX160	Honda GX270	Honda GX390	Honda GX340
	Displacement/HP	1.5 HP	160 cc	187 cc	163 cc	270 cc	389 cc	389 cc
	Fuel Capacity	N/A	0.5 gallon	0.5 gallon	.825 gallon	1.4 gallons	1.6 gallons	1.6 gallons
	Low Oil Shutdown	N/A	N/A	N/A	Standard	Standard	Standard	Standard
PUMP	Pump Model	Comet BXD	Comet VRX	Comet AXD	Cat 4DNX	Cat 4SPX	Cat 66DX	AR
	Flow (GPM)	1.5	2.5	2.5	2.5	3.0	3.5	4.25
	PSI	1700	2800	3000	3000	3300	4000	3000
FRAME	Cart Type	2-Wheel Cart	2-Wheel Cart	2-Wheel Cart	2-Wheel Cart	2-Wheel Cart	2-Wheel Cart	2-Wheel Cart
	Gauge Steel	12	12	12	12	12	12	12
	Dimensions	34" x 21" x 38"	34" x 21" x 38"	34" x 21" x 38"	34" x 21" x 38"	34" x 21" x 38"	34" x 21" x 38"	34" x 21" x 38"
	Machine Weight	95 lbs	77 lbs	83 lbs	96 lbs	123 lbs	147 lbs	150 lbs
GUN/NOZZLES	Spray Gun	Front Entry, 3' Lance	Rear Entry, 3' Lance	Rear Entry, 3' Lance	Rear Entry, 3' Lance	Rear Entry, 3' Lance	Rear Entry, 3' Lance	Rear Entry, 3' Lance
	Nozzle Type	Quick-Connect	Quick-Connect	Quick-Connect	Quick-Connect	Quick-Connect	Quick-Connect	Quick-Connect
	Nozzle Size	2.0	3.0	3.0	3.0	3.0	3.5	5.0
	Nozzle Degree	15°, Soap	25°, Soap	25°, Soap	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap	0°, 15°, 40°, Soap
	Hose	3/8" x 25' Non-marking	3/8" x 25' Non-marking	3/8" x 25' Non-marking	3/8" x 50' Non-marking	3/8" x 50' Non-marking	3/8" x 50' Non-marking	3/8" x 50' Non-marking
WATER	Maximum Inlet Temp	140° F	140° F	140° F	140° F	140° F	140° F	140° F
	Maximum Outlet Temp	140° F	140° F	140° F	140° F	140° F	140° F	140° F
WHEELS	Adjustable Pressure	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Chemical Injector	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Thermal Protector	Yes	Yes	Yes	Yes	Yes	Yes	Yes
WHEELS	Wheel Size	10" pneumatic	10" pneumatic	10" pneumatic	10" pneumatic	10" pneumatic	10" pneumatic	13" no flat
WARRANTY		2-year (Consumer) / 1-year (Commercial) Limited Warranty						

*Requires 36" GFCI power cord

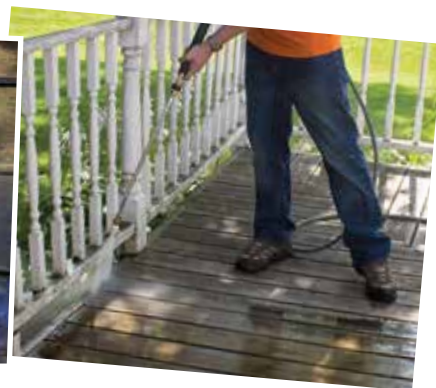

HOT WATER PRESSURE WASHERS

ELECTRIC OR GAS

- Clean houses/buildings, driveways, sidewalks, vehicles, decks, boats, tractors, equipment and more
- Steam capabilities allow for the removal of tough grease and grime
- Beckett burner with thermostat control for temperatures up to 250° and reliable performance
- Maximum inlet water temperature of 140°F / maximum outlet water temperature of 250° F
- Chemical injection system allows for the use of cleaners and other chemicals designed for pressure washers through siphoning tube
- Color-coded, quick-connect nozzles make nozzle changes easy (comes standard with 0°, 15°, 25°, 40°, soap and steam)
- Industrial rear-entry spray gun has 3' lance for better control and reach
- 3/8" x 50' non-marking hose
- Adjustable pressure
- Large, pneumatic tires make for smoother transport
- Standard with parking brakes (**BRP4030HCA only**)
- Powder coated, 10-gauge steel frame
- 2-year (consumer) / 1-year (commercial) limited warranty



BRP1520ECA

BRP4030HCA

ITEM #	ENGINE	PUMP	GPM	NOZZLE SIZE	WEIGHT	RETAIL
BRP1520ECA	2.0 HP 115-Volt (20 Amp)	Cat 4DX	1.5	2.0	385 lbs	\$2,400
BRP4030HCA	389 cc Honda GX390	Cat 66DX	4.0	4.5 (3.5 Steam)	557 lbs	\$4,000

PRESSURE WASHER NOZZLES

ITEM #	DESCRIPTION	RETAIL
900020Q.DOS	0° – #2.0 Nozzle Size (Red)	\$8
900030Q.DOS	0° – #3.0 Nozzle Size (Red)	\$8
900035Q.DOS	0° – #3.5 Nozzle Size (Red)	\$8
782122.DOS	0° – #4.5 Nozzle Size (Red)	\$8
915020Q.DOS	15° – #2.0 Nozzle Size (Yellow)	\$8
915030Q.DOS	15° – #3.0 Nozzle Size (Yellow)	\$8
778945.DOS	15° – #3.5 Nozzle Size (Yellow)	\$8
782120.DOS	15° – #4.5 Nozzle Size (Yellow)	\$8
925020Q.DOS	25° – #2.0 Nozzle Size (Green)	\$8
925030Q.DOS	25° – #3.0 Nozzle Size (Green)	\$8
925035Q.DOS	25° – #3.5 Nozzle Size (Green)	\$8
777844.DOS	25° – #4.5 Nozzle Size (Green)	\$8
940020Q.DOS	40° – #2.0 Nozzle Size (White)	\$8
940030Q.DOS	40° – #3.0 Nozzle Size (White)	\$8
940035Q.DOS	40° – #3.5 Nozzle Size (White)	\$8
778737.DOS	40° – #4.5 Nozzle Size (White)	\$8
778949.DOS	65° – #4.0 Nozzle Size	\$7
NYR36K30.DOS	Turbo Nozzle* – #3.0 Nozzle Size	\$99
778150.DOS	2-Pack: 15° & 65° – #2.0 Nozzle Size	\$10
38530.DOS	2-Pack: 25° & 65° – #3.0 Nozzle Size	\$10
778197.DOS	5-Pack: 0°, 15°, 25° 40° & Soap – #2.0 Nozzle Size	\$32
38531.DOS	5-Pack: 0°, 15°, 25° 40° & Soap – #3.0 Nozzle Size	\$32
38532.DOS	5-Pack: 0°, 15°, 25° 40° & Soap – #3.5 Nozzle Size	\$32

*Not recommended for use on wood or painted surfaces.

PRESSURE WASHER HOSES & HOSE ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
38524.DOS	Non-Marking Hose, 25'	\$60
38525.DOS	Non-Marking Hose, 50'	\$100
780841.DOS	Black Pressure Hose, 25'	\$31
DHR50100D.DOS	Hose Reel (for up to 3/8" x 100' hose)	\$119

PRESSURE WASHER SPRAY GUNS/LANCES/WANDS

ITEM #	DESCRIPTION	RETAIL
38526.DOS	Spray Gun, M22 Coupler Out / M22-M Coupler In	\$26
38527.DOS	Gun/Lance Combo, M22 Coupler Out / 3/8" NPT-M In	\$35
779165.DOS	Gun/Lance Combo, 22mm Coupler Out / 3/8" QC In	\$50
791309.DOS	Chrome Lance, 18.5", 15° Bend	\$19
791278.DOS	Chrome Lance, 18.5", 15° Bend with Insulated Coupler	\$22
DCLTG24.DOS	Telescoping Wand, 24' Fiberglass	\$150
DCLTG24A4.DOS	Telescoping Wand, 24' Aluminum	\$200
ND20015.DOS	Telescoping Wand Belt	\$30

PRESSURE WASHER COUPLERS/NIPPLES/FILTERS/O-RINGS

ITEM #	DESCRIPTION	RETAIL
778236.DOS	Brass Coupler, 22 mm with Female NPT	\$8
22321.DOS	Brass Nipple with Male NPT	\$5
35169.DOS	Inlet Filter, 1/2" NPT-M	\$26
38596.DOS	Inlet Filter, 3/8" NPT-M	\$26
N100040.DOS	O-Ring Kit	\$9
D10052.DOS	Pipe Nipple, 3/8" Union	\$5
777915.DOS	Quick Coupler, 3/8" with Female Inlet	\$5
777913.DOS	Quick Coupler, 3/8" with Male Inlet	\$5
777914.DOS	Quick Coupler, Brass with Female NPT	\$8
780455.DOS	Quick Coupler, Brass with Male NPT	\$8
D10037.DOS	Quick Coupler, 22 mm	\$8
221008.DOS	Quick Coupler, 22 mm with Male Fitting	\$8
D10010.DOS	Quick Coupler, Brass	\$10
777904.DOS	Quick Coupler, Brass with Female NPT	\$8
791274.DOS	Quick Coupler, Brass with Female NPT, Insulated	\$11

PRESSURE WASHER ATTACHMENTS & ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
D20011.DOS	Gutter Cleaner, 12"	\$20
791691.DOS	Inline Mag Flowswitch, 3/8" Female NPT, 12 GPM	\$66
DCFSCP20.DOS	Surface Cleaner, 20"	\$420
790561.DOS	Thermostat, 70° - 250° F with Control Knob	\$52
100868.DOS	Water Broom with 36" Lance	\$76



SURFACE CLEANER

EARTH AUGER

ONE OR TWO PERSON OPERATION

- Enclosed, spur gear design transmission
- All-metal automatic 3" diameter centrifugal clutch
- Hand rewind starter
- Bits sold separately (see next page)



BRP240HHD



BRP330HHD

POWERED by
HONDA

ITEM #	ENGINE	DRIVESHAFT CONNECTION	MAX DRILLING TORQUE	RPM	WEIGHT	RETAIL
BRP240HHD	35 cc Honda GX35	1" Round	51 ft lbs	166 (No Load)	28 lbs	\$899
BRP330HHD	160 cc Honda GXV160	1-3/8" Hexagon	190 ft lbs	144 (No Load)	71 lbs	\$1,899
BRP343HHD	160 cc Honda GXV160	7/8" Ground Hog® (Square)	190 ft lbs	144 (No Load)	71 lbs	\$1,899



for BRP240HHD



for BRP330HHD



for BRP343HHD



AUGER BITS

ITEM #	DESCRIPTION	TYPE	DIAMETER	LENGTH	DRIVESHAFT CONNECTION	APPLICATIONS	RETAIL
BR10580	Auger Bit	Earth	2"	30"	1" Round	BRP240HHD	\$130
BR10581	Auger Bit	Earth	3"	30"	1" Round	BRP240HHD	\$132
BR10582	Auger Bit	Earth	4"	30"	1" Round	BRP240HHD	\$134
BR10583	Auger Bit	Earth	6"	30"	1" Round	BRP240HHD	\$142
BR10584	Auger Bit	Earth	8"	30"	1" Round	BRP240HHD	\$156
BR10585	Bit Extension	N/A	N/A	15"	1" Round	BRP240HHD	\$95
BR10586	Auger Bit	Earth	4"	36"	1.38" Hexagon	BRP330HHD	\$253
BR10587	Auger Bit	Earth	6"	36"	1.38" Hexagon	BRP330HHD	\$268
BR10588	Auger Bit	Earth	8"	36"	1.38" Hexagon	BRP330HHD	\$284
BR10590	Auger Bit	Earth	12"	36"	1.38" Hexagon	BRP330HHD	\$311
BR10591	Auger Bit	Earth	14"	36"	1.38" Hexagon	BRP330HHD	\$370
BR10592	Auger Bit	Earth	16"	36"	1.38" Hexagon	BRP330HHD	\$610
BR10593	Auger Bit	Planting	18"	30"	1.38" Hexagon	BRP330HHD	\$575
BR10594	Bit Extension	N/A	N/A	15"	1.38" Hexagon	BRP330HHD	\$107
BR10595	Auger Bit	Earth	4"	36"	0.88 Square	BRP343HHD	\$253
BR10596	Auger Bit	Earth	6"	36"	0.88 Square	BRP343HHD	\$268
BR10597	Auger Bit	Earth	8"	36"	0.88 Square	BRP343HHD	\$284
BR10598	Auger Bit	Earth	10"	36"	0.88 Square	BRP343HHD	\$295
BR10599	Auger Bit	Earth	12"	36"	0.88 Square	BRP343HHD	\$311
BR10600	Auger Bit	Earth	14"	36"	0.88 Square	BRP343HHD	\$370
BR10601	Auger Bit	Earth	16"	36"	0.88 Square	BRP343HHD	\$610
BR10602	Auger Bit	Planting	18"	36"	0.88 Square	BRP343HHD	\$575
BR10603	Bit Extension	N/A	N/A	15"	0.88 Square	BRP343HHD	\$107

AUGER BIT PARTS

ITEM #	DESCRIPTION	TYPE	DIAMETER	RETAIL
BR10604	Bit Blade	Earth	4"	\$10
BR10605	Bit Blade	Earth	6"	\$11
BR10606	Bit Blade	Earth	8"	\$12
BR10607	Bit Blade	Earth	10"	\$11
BR10608	Bit Blade	Earth	12"	\$19
BR10609	Bit Screw	Earth	N/A	\$17
BR10610	Bit Screw	Earth	N/A	\$5
BR10611	Bit Screw	Earth	2.5"	\$13
BR10612	Bit Tooth	Earth	2.5"	\$16



AUGER DISPLAY STANDS

ITEM #	DESCRIPTION	RETAIL
999-350.BRA	One Person Auger Stand (for BRP240HHD)	\$120
999-351.BRA	Two Person Auger Stand (for BRP330HHD)	\$120
999-352.BRA	Two Person Auger Stand (for BRP343HHD)	\$120



NEW

BUSH CUTTER

26" CUTTING WIDTH

- Cut up to 3" diameter saplings
- Two blades, sharpened on both sides and edge, giving a total of 12 cutting edges
- Fully enclosed deck for operator safety
- Hand operated hydrostatic drive (with reverse)
- User-friendly hydro release
- Industrial grade bearings
- Heavy-duty front caster wheels
- Adjustable skid plates
- 16/6.5 x 8 pneumatic bar lug tires, filled with sealant
- **Battery not included**



ITEM #	ENGINE	MINIMUM CUT HEIGHT	CUT WIDTH	BLADE TIP SPEED	WEIGHT	RETAIL
BRPBC26HE	389 cc Honda GX390 w/ Electric Start	2"	26"	150 MPH (129 blade strikes/second)	323 lbs	\$4,750

NEW

EDGER

EDGE SCAPER

- Heavy-duty, all steel construction
- Convenient, all-in-one engagement and depth control lever
- Adjustable height rear wheel allows for curb edging
- Two belt, blade drive system
- No cable controls
- 1" spindle shaft
- 10" star blade
- 9" steel wheels



ITEM #	ENGINE	DRIVE	BLADE SIZE	MAX CURB HEIGHT	WEIGHT	RETAIL
BRPE109H	163cc Honda GX160	Double Belt	Up to 10"	10"	115 lbs	\$1,635

NEW

WIRE INSTALLER

POW'R INSTALLER

- Easily install invisible dog fences or low voltage wire
- Dig the trench, lay the wire, cover the wire/trench all in one motion
- Fully enclosed trench operation
- Tungsten carbide rotor points
- 9 x 3.50-4 pneumatic tires
- 26" W x 52" H (42" H with handle folded)



ITEM #	ENGINE	DRIVE	SPEED	WEIGHT	RETAIL
BRPT4H	163 cc Honda GX160	Double Belt	Up to 25 ft/min	95 lbs	\$2,050

SKID STEER PLATE DISPLAY

INCLUDES 5 SKID STEER PLATES

- Universal fit to skid steers using standard universal quick attachments
- Weld to existing attachment
- Heavy-duty 5/16" steel construction
- 48" x 21-3/8" (W x H)
- **Display and 5 plates included**
(choose BR1050 and/or BR1052)



ITEM #	DESCRIPTION	RETAIL
BR1053-COMPLETE KIT	Skid Steer Plate Display (Includes 5 Skid Steer Plates of Choice)	\$699

SKID STEER PLATES

ITEM #	DESCRIPTION	RETAIL
BR1050	Display Replenishment Cut-Out Quick Attach Skid Steer Plate (Each)	\$140
BR1052	Display Replenishment Solid Quick Attach Skid Steer Plate (Each)	\$140

HYDRAULIC POWER PACKS

SAVE FUEL & MAINTENANCE

- Portable power to run power conveyors, augers, lifts, hydraulic motors and other implements
- Save money on fuel costs as well as hours and maintenance running your tractor
- One-way detent, one-way spring return valve
- 1/2" stainless steel inlet and outlet ports for quick disconnect
- Haldex single stage pump delivers constant flow and pressure without spikes
- Easy to transport with compact design and heavy-duty handlebars (optional wheel kits also available)
- Hydraulic fluid continually lubricates the system with no grease needed



ITEM #	ENGINE	PUMP GPM	PSI	TANK	WEIGHT	RETAIL
HBH13GC	160 cc Honda GC160	7	900	5.6 gallon	133 lbs	\$1,122
HBH16GX	163 cc Honda GX160	7	900	5.6 gallon	133 lbs	\$1,326
HBHXL16GX	270 cc Honda GX270	7	1500	10.3 gallons	185 lbs	\$1,632

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
HBHW13	Wheel Kit (for HBH13GC and HBH16GX)	\$140
HBHXLW13	Wheel Kit (for HBHXL16GX)	\$140



GNE

CEI



CHIPPER KNIVES

STUMP GRINDER BOLTS

STUMP GRINDER POCKETS

STUMP GRINDER TEETH



CEI 500 SERIES STUMP GRINDER TEETH & POCKETS

- Feature a tungsten carbide tip
- Available in left, right or straight
- 1/2" x 1/2" shank allows them to fit in standard 1/2" x 1/2" pockets
- Pocket does not need to be removed to change teeth – simply loosen the bolts, remove existing teeth, replace with new teeth and retorquer the bolts to 220-225 ft lbs
- Use CEI bolts (see page 28)



ITEM #	DESCRIPTION	RETAIL
5003.CEI	Tooth: Left	\$4.50
5001.CEI	Tooth: Straight	\$4.50
5002.CEI	Tooth: Right	\$4.50
5004.CEI	Pocket: Countersunk	\$8.27
5005.CEI	Pocket: Fine Threaded	\$8.27

CEI 800 SERIES STUMP GRINDER TEETH & POCKETS

- Feature a patented (PAT. 4759394) cutting angle similar to a saw blade that produces a slicing action compared to the impacting/tearing action of competitors' teeth
- Tungsten carbide tip is silver soldered in place and protected by the stone collar
- Pocket does not need to be removed to change teeth – simply loosen the bolts, remove existing teeth, replace with new teeth and retorquer the bolts to 220-225 ft lbs
- Use CEI bolts (see page 28)



ITEM #	DESCRIPTION	RETAIL
8003.CEI	Tooth: Left	\$8.06
8001.CEI	Tooth: Straight	\$8.06
8002.CEI	Tooth: Right	\$8.06
8008.CEI	Pocket: Countersunk	\$8.27
8009.CEI	Pocket: Fine Threaded	\$8.27

CEI 800V SERIES STUMP GRINDER TEETH & POCKETS

- Designed to lock securely into Vermeer Pro-Series stump grinder pockets
- Feature a patented (PAT. 4759394) cutting angle similar to a saw blade that produces a slicing action compared to the impacting/tearing action of competitors' teeth
- Tungsten carbide tip is silver soldered in place and protected by the stone collar
- Torque the bolts to 220-225 ft lbs
- Use CEI bolts (see page 28)




ITEM #	DESCRIPTION	RETAIL
80033.CEI	Tooth: Left	\$8.06
80011.CEI	Tooth: Straight	\$8.06
80022.CEI	Tooth: Right	\$8.06
8008.CEI	Pocket: Countersunk	\$8.27
8009.CEI	Pocket: Fine Threaded	\$8.27

CEI DUAL 800 SERIES

STUMP GRINDER TEETH & POCKETS

- Feature a patented (PAT. 4759394) cutting angle similar to a saw blade that produces a slicing action compared to the impacting/tearing action of competitors' teeth
- Tungsten carbide tip is silver soldered in place and protected by the stone collar
- Two teeth in one, simply rotate the tooth 180° for a fresh cutting edge
- Torque the bolts to 220-225 ft lbs
- **Use CEI bolts (see page 28)**

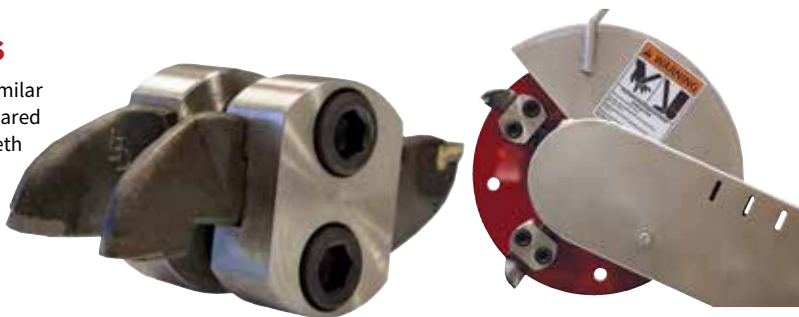

ITEM #	DESCRIPTION	RETAIL
8206.CEI	Tooth: Left	\$12.95
8207.CEI	Tooth: Straight Left	\$12.95
8208.CEI	Tooth: Right	\$12.95
8209.CEI	Tooth: Straight Right	\$12.95
8008.CEI	Pocket: Countersunk	\$8.27
8009.CEI	Pocket: Fine Threaded	\$8.27

GLADIATOR SERIES

STUMP GRINDER TEETH & POCKETS

- Cutting angle increases cutting speed, eliminates pocket/bolt wear and produces the smoothest cut ever
- Aggressive nature of the Gladiator teeth mean it is not necessary to run as many cutter teeth – often only half the number of normal teeth are needed
- Dual shoulder helps lock the Gladiator tooth securely in the pocket
- Ideal for customers wanting to purchase less frequently
- Torque the bolts to 220-225 ft lbs
- **Use CEI bolts (see page 28)**




ITEM #	DESCRIPTION	RETAIL
90061.CEI	Tooth: Straight Left	\$15.24
9006A.CEI	Tooth: Bent	\$15.24
8008.CEI	Pocket: Countersunk	\$8.27
8009.CEI	Pocket: Fine Threaded	\$8.27

S-PRO SERIES

STUMP GRINDER TEETH & POCKETS

- Heavy-duty shank with an oval indent for a perfect fit into the S-Pro pocket and any other 3/4" pockets
- S-Pro Series is also a fit for Vermeer's Pro Series pockets
- Placement is easy as the notch allows a quick and secure fit of the indented shank into the pocket
- Pocket fits both sides of the wheel for a universal one-pocket inventory
- Torque the bolts to 220-225 ft lbs
- **Use CEI bolts (see page 28)**

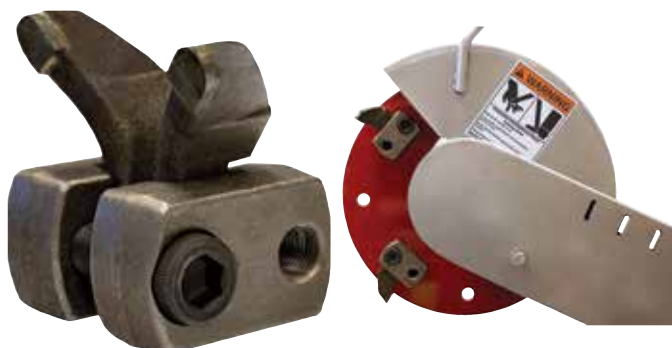

ITEM #	DESCRIPTION	RETAIL
8013.CEI	Tooth: Left	\$8.06
8011.CEI	Tooth: Straight	\$8.06
8012.CEI	Tooth: Right	\$8.06
8014.CEI	Pocket: S-Pro	\$8.27

CEI UNI-PRO POCKET FOR CEI STUMP GRINDER TEETH

- A reversible, universal pocket that can go on either side of the wheel
- Pocket fits all CEI teeth series, except the CEI 500 Series
- Pocket fits both sides of the wheel for a universal one-pocket inventory
- Use CEI bolts (see page 28)



ITEM #	DESCRIPTION	RETAIL
8015.CEI	Pocket: Uni-Pro	\$8.27

CEI ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
70075	Green Wheel: Sharpen the carbide tips of your stump grinder teeth.*	\$42.84
900024-T	Hex Socket: Quickly install and/or remove bolts.	\$8.00
800999	Tungsten Carbide Tips: Silver solder these carbide tips onto your existing teeth for a fresh cutting surface.	\$3

**CAUTION: Follow all safety guidelines as printed on the green wheel. Some of the steel behind the carbide may have to be removed. DO NOT sharpen the flat face of the carbide. Sharpening carbide can be hazardous to your health. Use an approved breathing apparatus and eye protection when sharpening.*



GREEN WHEEL



HEX SOCKET



TUNGSTEN CARBIDE TIPS

GREENTEETH® 500 SERIES STUMP GRINDER TEETH & POCKETS

- For stump grinders under 18 HP
- Available in green or red
- Green teeth feature a shallower dish on the concave carbide tip providing more resistance, but a slower cut when compared to the red teeth
- Red teeth feature a deeper dish on the concave carbide tip making them more aggressive with a faster cut than green teeth, but less impact resistance to the red teeth
- Three-position indexable – just loosen, turn and tighten for a fresh sharp edge.
- Torque the bolts to 180-200 ft lbs
- Use LoPro™ bolts (see page 28)



ITEM #	DESCRIPTION	RETAIL
783557	Tooth: Green	\$6.95
783557-1	Tooth: Red	\$6.95
783554	LoPro™ Pocket: Angle	\$8.25
784165	LoPro™ Pocket: Straight	\$8.25

GREENTEETH® 700 SERIES STUMP GRINDER TEETH & POCKETS



- For stump grinders 18-35 HP
- Three-position indexable – just loosen, turn and tighten for a fresh sharp edge
- Wearsharp™ design allows the tooth to retain a sharp cutting surface, unlike traditional teeth that tend to round over for a consistent cut through the life of the tooth
- LoPro™ pockets feature a slim design that allows 3/4" clearance between the side of the pocket and the stump to prevent rubbing and wear
- Torque the bolts to 180-200 ft lbs
- Use LoPro™ bolts (see page 28)



ITEM #	DESCRIPTION	RETAIL
783558-700WS	Tooth: Wearsharp™	\$8.95
783559	LoPro™ Pocket: Angle	\$8.95
783559-700LPR	LoPro™ Pocket: Reverse	\$8.95
784166	LoPro™ Pocket: Straight	\$8.95

GREENTEETH® 900 SERIES STUMP GRINDER TEETH & POCKETS



- For stump grinders 35-90 HP
- Three-position indexable – just loosen, turn and tighten for a fresh sharp edge
- Wearsharp™ design allows the tooth to retain a sharp cutting surface, unlike traditional teeth that tend to round over for a consistent cut through the life of the tooth
- LoPro™ pockets feature a slim design that allows 3/4" clearance between the side of the pocket and the stump to prevent rubbing and wear
- Torque the bolts to 180-200 ft lbs
- Use LoPro™ bolts (see page 28)



ITEM #	DESCRIPTION	RETAIL
783558-900WS	Tooth: Wearsharp™ (For stump grinder wheels 23" and larger)	\$10.95
783558-900WS2	Tooth: Wearsharp™ (For stump grinder wheels 23" and larger), 2-Sided Shank	\$10.95
783558-926WS	Tooth: Wearsharp™ (For stump grinder wheels 22" and smaller)	\$10.95
783558-926WS2	Tooth: Wearsharp™ (For stump grinder wheels 22" and smaller), 2-Sided Shank	\$10.95
783559-900LPA	LoPro™ Pocket: Angle	\$9.95
783559-900LPR	LoPro™ Pocket: Reverse	\$9.95
784166-900LPS	LoPro™ Pocket: Straight	\$9.95



GREENTEETH® 1100 SERIES STUMP GRINDER TEETH & POCKETS

- For stump grinders over 90 HP
- Three-position indexable – just loosen, turn and tighten for a fresh sharp edge
- Wearsharp™ design allows the tooth to retain a sharp cutting surface, unlike traditional teeth that tend to round over for a consistent cut through the life of the tooth
- LoPro™ pockets feature a slim design that allows 3/4" clearance between the side of the pocket and the stump to prevent rubbing and wear
- Torque the bolts to 180-200 ft lbs
- **Use Greenbolts (see page 28)**



ITEM #	DESCRIPTION	RETAIL
783558-1100WS	Tooth: Wearsharp™	\$13.95
783559-1100CBA	LoPro™ Pocket: Counterbore, Angle	\$11.25
783559-1100CBR	LoPro™ Pocket: Counterbore, Reverse	\$11.25
784166-1100CBS	LoPro™ Pocket: Counterbore, Straight	\$11.25
783559-1100THA	LoPro™ Pocket: Threaded, Angle	\$11.25
783559-1100THR	LoPro™ Pocket: Threaded, Reverse	\$11.25
784166-1100THS	LoPro™ Pocket: Threaded, Straight	\$11.25



REVERSE-S™ KIT FROM GREENTEETH®

- **Kit includes:** one Reverse-S™ wheel, thirty 900 Series Wearsharp™ teeth, twenty-four 900 Series LoPro™ angled pockets, four 900 Series LoPro™ straight pockets, two 900 Series LoPro™ right pockets, twelve LoPro™ 2-1/2" bolts, six LoPro™ 2-3/4" bolts, twelve LoPro™ 3" bolts, one Allen wrench/socket and mounting hardware specific to the stump grinder make and model application
- **Call for part numbers**
- **Dropship item direct to you with FREE shipping**



GREENWHEEL® KIT FROM GREENTEETH®

- **Kit includes:** one Greenwheel®, six 900 Series Wearsharp™ teeth, two mounting blocks, two tooth holders, four 3" LoPro™ bolts, one Allen wrench/socket and mounting hardware specific to the stump grinder make and model application
- **Call for part numbers**
- **Dropship item direct to you with FREE shipping**



QUADWHEEL® KIT FROM GREENTEETH®

- **Kit includes:** one Quadwheel®, twelve 900 Series Wearsharp™ teeth, four mounting blocks, four tooth holders, eight 3" LoPro™ bolts, one Allen wrench/socket and mounting hardware specific to the stump grinder make and model application
- **Call for part numbers**
- **Dropship item direct to you with FREE shipping**

**VISIT CEISUPPLY.COM/STUMP-GRINDER-WHEELS
TO LEARN MORE**

ITEM #	DESCRIPTION	RETAIL
Call for Part Number	Reverse-S™	\$2,500
Call for Part Number	Greenwheel® Kit	\$1,300
Call for Part Number	Quadwheel®	\$1,700

LEONARDI™ M1® BLUESHARK™ STUMP GRINDER TEETH

- Three-position indexable – just loosen, turn and tighten for a fresh sharp edge
- Available in black, gold or red
- Black teeth are for regular soils, gold teeth are for rocky soils and red teeth are for sandy or clay soils
- No pocket, bolts or allen wrenches needed



ITEM #	DESCRIPTION	RETAIL
786403	Tooth: Black (For regular soils)	\$52.45
786461	Tooth: Gold (For rocky soils)	\$52.45
786462	Tooth: Red (For sandy/clay soils)	\$52.45



CEI BOLTS

ITEM #	SIZE	RETAIL
60032	1.75"	\$2.60
6004	2.00"	\$2.60
6005	2.25"	\$2.60
6006	2.50"	\$2.60
60106	2.75"	\$2.97
6007	3.00"	\$2.97
60034	3.50"	\$2.97



LOPRO™ BOLTS

ITEM #	SIZE	RETAIL
783555	1.75"	\$2.45
783555-2	2.00"	\$2.45
783555-2.25	2.25"	\$2.45
783555-2.5	2.50"	\$2.45
783555-2.75	2.75"	\$2.45
783555-3	3.00"	\$2.45




GREENBOLTS

ITEM #	SIZE	RETAIL
783555-1.75GB	1.75"	\$2.45
783555-2GB	2.00"	\$2.45
783555-2.25GB	2.25"	\$2.45
783555-2.5GB	2.50"	\$2.45
783555-2.75GB	2.75"	\$2.45
783555-3GB	3.00"	\$2.45

SIMONDS™ CHIPPER KNIVES

- A8 modified knife steel
- Heat treated to be very hard
- Provide best abrasion resistance, cutting edge retention and impact resistance
- Made in the USA

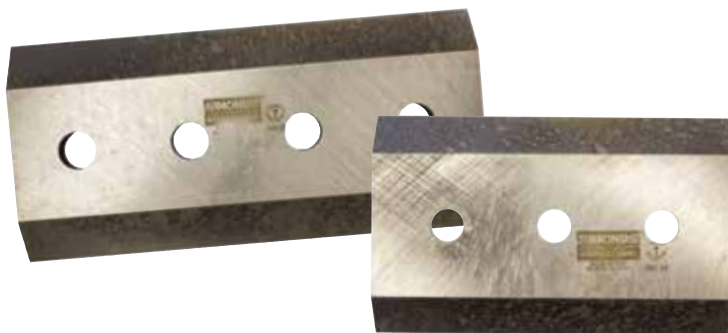

ITEM #	LENGTH	WIDTH	THICKNESS	NUMBER OF HOLES	BEVEL ANGLE	WEIGHT	RETAIL
19052000	5-3/32	4	1/2	2	31	2.14 lbs	\$39.99
19071640	7-1/4	4	3/8	3	31	2.40 lbs	\$35.29
19071660	7-1/4	4	1/2	3	31	3.05 lbs	\$43.69
19071700	7-1/4	4-1/2	1/2	3	31	3.45 lbs	\$43.69
19103260	10-1/2	5	1/2	4	31	5.80 lbs	\$59.99
80870	10	5	5/8	5	30	7.35 lbs	\$78.99
19100250	10-1/2	5-1/2	5/8	4	31	6.86 lbs	\$69.99

DOSKO®

A GNE BRAND

BRUSH CHIPPERS

STUMP GRINDERS



GNE

DOSKO

DOSKO®

A GNE BRAND



FREE
IN CONTIGUOUS 48 STATES
FREIGHT

FASTEST, EASIEST TO USE UNITS ON THE MARKET TODAY

Quality construction, operator safety features and a user-friendly design make Dosko's walk-behind stump grinders powerful and efficient. A unique side discharge frame keeps cuttings away from the machine while grinding.

Heavy-Duty Belts & Bearings

Heavy-duty belt and idler bearings are easily accessible with the removal of three easy to reach bolts. Our belts require less tension resulting in reduced belt vibration and slipping. This also reduces excess load to the engine and cutter wheel bearings, increasing engine and bearing life.

POWERED by
HONDA

Side Discharge Frame

Dosko's unique side discharge frame removes cuttings out and away from the machine while grinding to keep your work area cleaner than with the use of channel frame stump grinders.

Narrow Width

With widths between tires at 32" or less, Dosko stump grinders will fit easily through narrow pathways and gates.

Operator Presence Bar


The operator presence handlebar cuts all power to the stump grinder when you let go of the handle.

Adjustable Handlebar

Handlebar angle adjusts with a simple locking pin system giving you optimum comfort and control.

Cutter Teeth

Need a new cutting edge on the jobsite? No problem. Dosko's stump grinders come standard with Greenteeth®. These teeth can be rotated in three, 120° increments for a fresh cutting edge in minutes.

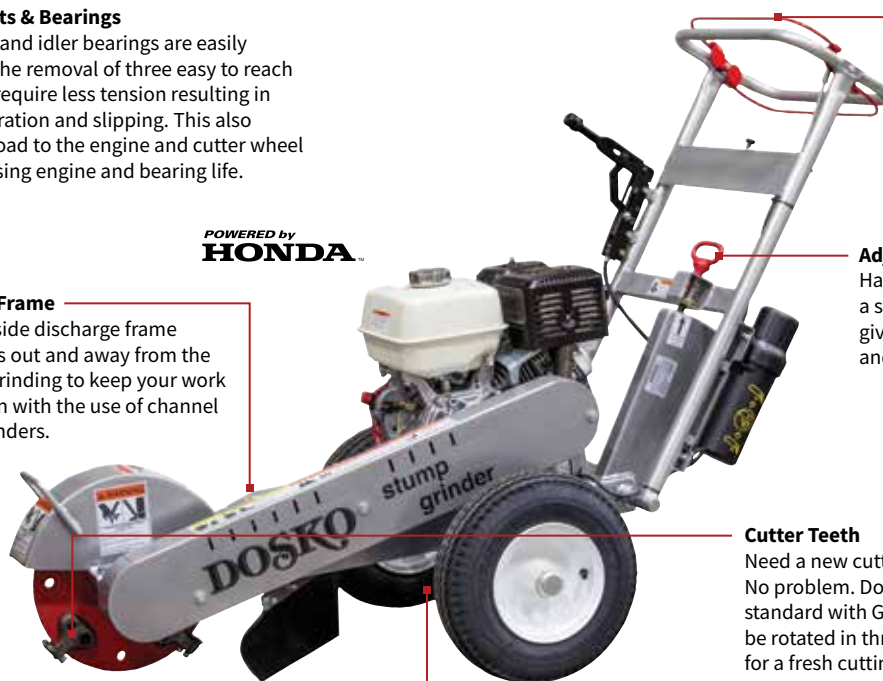



Stump Grinder Features:

- Patented side discharge frame automatically removes cuttings out and away from the machine
- Carbide-tipped Greenteeth® can be rotated in three, 120° increments for a fresh cutting edge in seconds
- Handlebar folds over unit for transport and compact storage (200-6HC Only)
- Towable with optional tow package (337-13HC & 620-20HE), transport in truck bed or trunk (200-6HC) or self-propel onto trailer or truck bed (691SP-20HE)

		Compact	Towable	Towable	Self-Propelled
ITEM NUMBER		200-6HC	337-13HC	620-20HE	691SP-20HE
RETAIL		\$2,945	\$4,699	\$5,999	\$8,399
ENGINE	Model	Honda GX200	Honda GX390	Honda GX630	Honda GX630
	Displacement	196 cc	389 cc	688 cc	688 cc
	Fuel Capacity	0.8 gallons	1.6 gallons	3.2 gallons	3.2 gallons
	Cyclone Air Filter	Yes	Yes	No	No
	Electric Start	No	No	Yes	Yes
	Low Oil Shutdown	Yes	Yes	Yes	Yes
CUTTER WHEEL	Diameter	10.5"	14"	10.5"	10.5"
	Thickness	1/2"	1-3/8"	1-3/8"	1-3/8"
	Bearings (Dia.) (2)	1"	1-3/16"	1-3/16"	1-3/16"
	Teeth Type	500 Series Greenteeth®	500 Series Greenteeth®	700 Series Greenteeth®	700 Series Greenteeth®
	Teeth Pockets	Reversible	Reversible	Reversible	Reversible
	Teeth Quantity	4	8	8	8
	Teeth Dimensions	0.5" x .25"	0.5" x .25"	0.75" x .25"	0.75" x .25"
	Cutter Wheel RPM	4700 RPM	2200 RPM	2500 RPM	3000 RPM
	Belt	AX37 (1)	Banded 3 Groove Power Band (1)	Banded 4 Groove Power Band (1)	2 AX90 (1)
	Drive	1600 Series Noram Clutch	Direct Drive	Direct Drive	Electromagnetic Clutch
CUTTING CAPACITY	Above Grade	10"	20"	20"	24"
	Below Grade	9"	16"	16"	18"
	Stump Diameter	No Limit	No Limit	No Limit	No Limit
GROUND TRAVEL	Transportation	Push/Pull	Push/Pull	Push/Pull	0-3 MPH
	Tow Package	N/A	Optional	Optional	N/A (Self Propelled)
	Tow Speed	N/A	45 MPH	45 MPH	N/A
WEIGHT	Weight	134 lbs	300 lbs	400 lbs	500 lbs
WARRANTY		2-year Non-Commercial Warranty 2-year Commercial Warranty on Weldments / 1-year Commercial Warranty on Hydraulic Motors, Valves and Pumps			

TOW PACKAGES

ITEM #	DESCRIPTION	RETAIL
337-357TP	Tow Package (for 337-13HC)	\$265
620-TP	Tow Package (for 620-25KE and 620-20HE)	\$265

ACCESSORIES

ADDITIONAL OPTIONS AVAILABLE SEE CEI ON PAGES 23-28

ITEM #	DESCRIPTION	RETAIL
783557-3	Complete Replacement Tooth Set: Includes 8 Greenteeth® 500 Series Green Teeth (for 337-13HC)	\$56
783557-2	Complete Replacement Set: Includes 8 Greenteeth® 500 Series Green Teeth, Pockets and Bolts (for 337-13HC)	\$141
783558-3	Complete Replacement Tooth Set: Includes 8 Greenteeth® 700 Series Green Teeth (for 620-20HE, 691SP-20HE)	\$72
783558-2	Complete Replacement Set: Includes 8 Greenteeth® 700 Series Green Teeth, Pockets and Bolts (for 620-20HE, 691SP-20HE)	\$163
783557	Greenteeth® 500 Series Green Tooth (for 200-6HC: 4 Required; for 337-13HC: 8 Required)	\$7
783558-700WS	Greenteeth® 700 Series Wearsharp™ Green Tooth (for 620-20HE, 620-20KE, 691SP-20HE: 8 Required)	\$9
783554	Greenteeth® 500 Series Angled Pocket (for 200-6HC: 2 Required; for 337-13HC: 4 Required)	\$8
783559	Greenteeth® 700 Series Angled Pocket (for 620-20HE, 620-25KE and 691SP-20HE: 4 Required)	\$9
784165	Greenteeth® 500 Series Straight Pocket (for 200-6HC: 2 Required; for 337-13HC: 4 Required)	\$8
784166	Greenteeth® 700 Series Straight Pocket (for 620-20HE, 620-25KE and 691SP-20HE: 4 Required)	\$9
783555	LoPro Bolt, 1.75" (for 200-6HC, 337-13HC, 620-20HE, 620-25KE and 691SP-20HE)	\$2.45

DOSKO®

54" Chute

Chute features adjustable angle deflector that allows material to be blown into the back of trucks or trailers

Fold Down Handles

Handles fold down for more compact transport and storage



Optional Tow Package
Item # 2964051



Brush Chipper Features:

- Double edge, reversible knife
- 4-way reversible bed knife (anvil) is 5.5" long x 3/16" thick for four fresh cutting edges in one
- Disc has a 21" diameter and is 0.5" thick
- Long-lasting Dodge greasable bearings are made in the USA
- Towable behind lawn and garden tractor, ATV or UTV with optional tow package (**NOT road towable**)
- 15" tall tires




Mechanical Belt Tensioning System
System allows for easy starts without the use of a centrifugal clutch

POWERED by
HONDA

Narrow Width
Narrow width of just 32" to fit through a standard gate



**ADJUSTABLE BED KNIFE PROVIDES
4 CUTTING EDGES IN ONE**

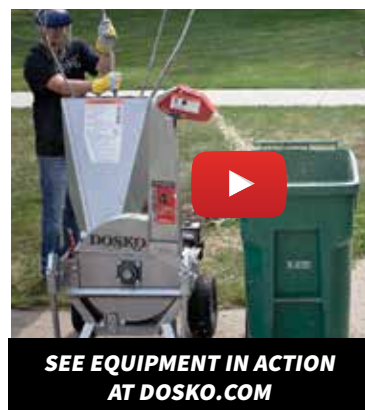

**SEE EQUIPMENT IN ACTION
AT DOSKO.COM**


Brush Chipper		
ITEM NUMBER	13-21T-13H	
RETAIL	\$3,499	
ENGINE	Model	Honda GX390
	Displacement	389 cc
	Fuel Capacity	1.6 gallons
DISC SYSTEM	Flywheel	3/4" Thick x 21" Diameter
	Disc RPM	2274 RPM
	Knives (Double Edge)	(1) 3/8" x 2-1/4" x 6-1/2"
	Belts	4 PowerRated Gates (3L)
	Ball Bearings, Shaft	1.5" Diameter, Dodge 4-Bolt Flange
	Bed Knife	4-Sided, 1/2" x 3"
FRAME	Dimensions	44" L (Closed) x 32" W 60" H
	Machine Weight	350 lbs
TRAILER	Axle	Straight
	Tires	15" Turf
	Tow Package	Optional (Item # 2964051)
WARRANTY	2-year Non-Commercial Warranty	
	2-year Commercial Warranty on Weldments /	
	1-year Commercial Warranty on Hydraulic Motors, Valves and Pumps	

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
2964051	Tow Package	\$265

Drainzit™

OIL CHANGING AID

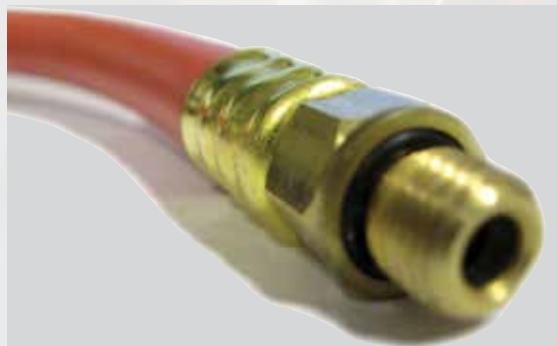

GNE

DRAINZIT

OIL CHANGING AID ELIMINATES MESSY OIL CHANGES

- Allows you to change the oil in your small, gas-powered engine without tipping, dismounting or modifying your engine in any way
- Fits engines with 1/4", 3/8", 10 mm, 12 mm, 14 mm, 16 mm or 20 mm oil ports
- High-quality brass fittings convert metric to SAE wrench sizes
- Custom-made SAE/metric fittings seal kit to engine with o-ring
- 300 PSI pressure tolerance
- Rubber retainer loop holds hose in place when not in use
- Sold in retail packaging (excludes Item # HON1414)
- **Perfect for small engines, generators, pressure washers, air compressors and more**



ITEM #	APPLICATIONS	DRAIN PORT SIZE	HOSE	LENGTH	WEIGHT	RETAIL
HON1010-C	Honda GX100, GX120, GX160, GX200 Kohler CS4, CS6	10 mm	1/4"	14"	1.0 lbs	\$21
HON1012-C	Honda iGX340, iGX390, GX240, GX270, GX340, GX390, GC160, GC190, GS190 Kohler CS8.5, CS10, CS12	12 mm	1/4"	14"	1.0 lbs	\$21
HON1014-C	Honda GX610, GX620, GX670 Kawasaki 3.7	14 mm	1/4"	14"	1.0 lbs	\$21
HON1420-C	Honda iGX440, GX630, GX660, GX690, GXV340, GXV390, GXV610, GXV620, GXV630, GXV660, GXV670, GXV690	20 mm	3/8"	14"	1.0 lbs	\$25
STAN1025-C	Briggs & Stratton Tecumseh (if 1/4" Thread Oil Drain Port)	1/4" NPT	1/4"	14"	1.0 lbs	\$21
STAN1438-C	Briggs & Stratton Tecumseh (if 3/8" Thread Oil Drain Port) Kohler Command OHC 16 HP and 18 HP	3/8" NPT	3/8"	14"	1.0 lbs	\$25

HOSE WITHOUT RETAIL PACKAGING

ITEM #	APPLICATIONS	DRAIN PORT SIZE	HOSE	LENGTH	WEIGHT	RETAIL
HON1414	Honda GX610, GX620, GX670 Kawasaki 3.7	14 mm	3/8"	14"	1.0 lbs	\$25



BEFORE

AFTER



JUMBO START UP Floor Display

- Must qualify by purchasing a 40+ piece order
- **FREE** floor display
- **FREE** shipping included with opening order
- After initial order, dealer must buy 40 or more kits to qualify for **FREE** shipping
- Item #
LG-DISPLAY.DRAINZIT (Qty: 1)
DISPLAY BOX - 15659 (Qty: 1)
DISPLAY HOOKS -15659 (Qty: 10)




JUNIOR START UP Counter Display

- Must qualify by purchasing an 18+ piece order
- **FREE** counter display or **FREE** shipping included with opening order
- Item #
SM-DISPLAY.DRAINZIT (Qty: 1)
DISPLAY BOX - 13219 (Qty: 1)



AIR COMPRESSORS

AIR HUB

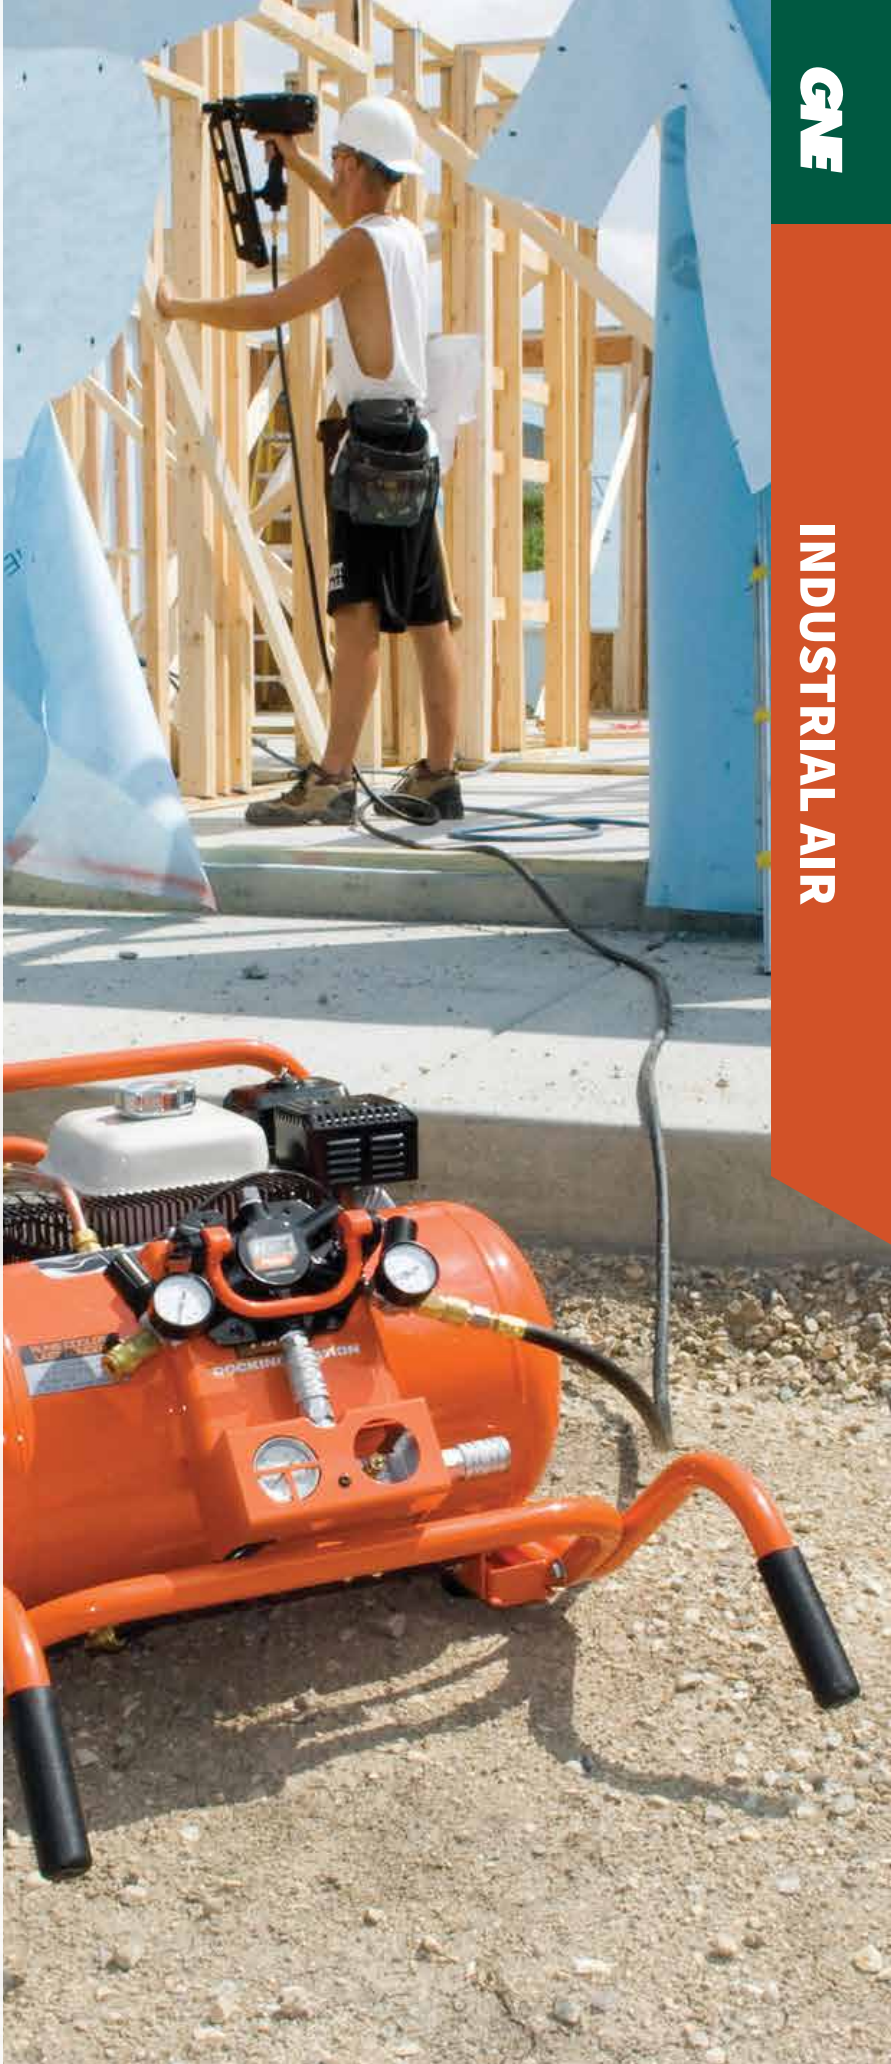

CNE

INDUSTRIAL AIR

HOT DOG AIR COMPRESSOR

LIGHT DUTY

- Durable cast iron cylinder
- No belts or pulleys to replace
- Heavy-duty induction motor; powerful, long lasting and low maintenance
- Equipped with single hand operation, brass (no spark/rust) quick connect
- Includes quick set regulator, tool and tank pressure gauges



ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	OPERATING TOOL CAPACITY	WEIGHT	RETAIL
CP1580325	120V Electric	3 Gallon	135	3.8	Oil Lube	Direct	Framers: 2; Roofers: 2	57 lbs	\$199

WHEELBARROW AIR COMPRESSORS

MEDIUM DUTY

- Twin "wheelbarrow" tank design: two, 4 gallon tanks
- Aluminum (CT5590816) or cast iron (CTA5590856 and DXCMTA1980854) twin cylinder pump



DXCMTA1980854



CT5590816



CTA5590856

ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	OPERATING TOOL CAPACITY	WEIGHT	RETAIL
DXCMTA1980854	120/240V Electric	8 Gallon	155	5.7	Oil Lube	Belt	Framers: 2-4; Roofers: 3-4	160 lbs	\$769
CT5590816	163cc Honda GX160	8 Gallon	130	8.9	Oil Lube	Belt	Framers: 2-3; Roofers: 3-4	151 lbs	\$999
CTA5590856	163cc Honda GX160	8 Gallon	155	9.9	Oil Lube	Belt	Framers: 4-7; Roofers: 6-8	168 lbs	\$999
DXCMTB5590856	163cc Honda GX160	8 Gallon	150	9.9	Oil Lube	Belt	Framers: 4-7; Roofers: 6-8	165 lbs	\$1,099

PONTOON AIR COMPRESSOR

MEDIUM DUTY

- Two "pontoon" tank design: two, 2 gallon tanks
- Patented pump design has 2-piece cooling system
- Lowers operating temperatures
- Equipped with regulator, gauges, quick connect and cushioned handle grips
- Air throttle cylinder



ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	OPERATING TOOL CAPACITY	WEIGHT	RETAIL
CTA5090412-50	160cc Honda GC160	4 Gallon	155	5.0	Oil Lube	Direct	Framers: 2-3; Roofers: 3-4	74 lbs	\$699

NEW**PRO-CREW COMPRESSOR****OIL FREE**

- Single "chopper" tank design: one 10 gallon tank
- 225 Max PSI tank supplies 3X more usable air to fully sink nails and 5.0 SCFM for fast recovery
- 1.7 HP soft start motor can start at -20° F or on an extension cord (recommended 12 ga x 50')
- At 55 lbs, it is up to 25% lighter than other 5.0 SCFM units in the market
- Compact roll cage frame is easy to carry and protects all vital components
- Oil free pump design for no maintenance and better cooling and ring wear for long life



ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	OPERATING TOOL CAPACITY	WEIGHT	RETAIL
C041I	120V Electric	4 Gallon	225	5.0	Oil Free	Belt	Framers: 3; Roofers: 5	55 lbs	\$330

WHEELBARROW AIR COMPRESSORS**HEAVY DUTY**

- Twin "wheelbarrow" tank design: two, 4.5 gallon tanks
- Super hi-flo 3- cylinder, single stage, cast iron pump
- H4X remote air hub included with easy on/off docking station
- Equipped with 1/2" unregulated high pressure port compatible with H4X Remote Air Hub system
- Air throttle cylinder
- Automotive style air cleaner
- Oil level sight glass
- Easily accessible oil fill and drain
- Transfers vibration to the ground
- Integrated control panel for added control and convenience includes: two quick connect air outlets, pressure regulator with large oversize knob, liquid filled tank and tool pressure gauges and pressure relief valve
- Shipped with synthetic oil for optimum performance and long life
- Two center mounted, turf tread, semi-pneumatic tires for greatest mobility
- Meets EPA and CARB emission requirements
- **Electric start**



CTA9090980.ES

ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	OPERATING TOOL CAPACITY	WEIGHT	RETAIL
CTA9090980.ES	270cc Honda GX270	9 Gallon	155	18.1	Oil Lube	Belt	Framers: 7-10; Roofers: 10-14	151 lbs	\$1,899

CHOPPER AIR COMPRESSOR**HEAVY DUTY**

- Single "chopper" tank design: one 10 gallon tank
- Aluminum pump body with cast iron cylinders
- Pump and motor positioned so weight rests on tire and not handles
- H4X remote air hub included with easy on/off docking station
- Runs cooler, dissipates heat faster, lasts longer
- Extra large center tire for unparalleled maneuverability
- Oil filled tank pressure gauge for accuracy
- Air throttle cylinder
- Compact to fit through standard 30" door frame and low profile to fit under tonneau truck cover
- Includes one 1/2" unregulated quick connect, two 1/4" high flow regulated quick connects and H4X Remote Air Hub




ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	OPERATING TOOL CAPACITY	WEIGHT	RETAIL
CWA5591016	163cc Honda GX160	10 Gallon	155	10.3	Oil Lube	Belt	Framers: 4-7; Roofers: 6-8	168 lbs	\$1,199

TRUCK MOUNT AIR COMPRESSOR HEAVY DUTY

- Uniquely designed metal belt guard improves compressor pump cooling by as much as 60° F over other belt guard designs
- Equipped with 1/2" unregulated high pressure port compatible with H4X Remote Air Hub system
- Automatic unloader valve releases compressed air when the tank is at full capacity
- Truck mountable horizontal air receiver provides more air for longer run times on air tools
- Uniquely designed metal belt guard improves compressor pump cooling by as much as 60° F over other belt guard designs
- Meets EPA and CARB emission requirements
- ASME certified

**COMES STANDARD WITH
ELECTRIC START**

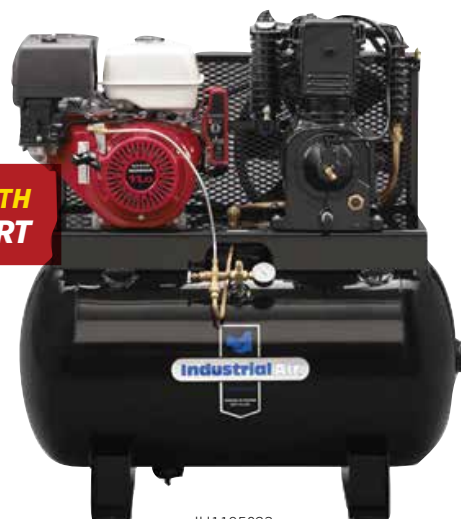


IH1195023

ITEM #	POWER	TANK SIZE	MAX PSI	CFM @ 90 PSI	PUMP	DRIVE	WEIGHT	RETAIL
IH1393075	389cc Honda GX390	30 Gallon	175	24.0	Oil Lube	Belt	497 lbs	\$2,570
IH1195023	389cc Honda GX390	50 Gallon	175	17.9	Oil Lube	Belt	497 lbs	\$2,412

H4X REMOTE HUB INCREASE PRODUCTION

- Installing the regulator at the end of your air hose allows the air flow to move unrestricted to your work point
- Tap directly into the tank with a 1/2" air hose and get the higher unregulated air pressure into your hands faster
- Allows you to run more nailers simultaneously
- **Provides 4 times faster recovery time of pneumatic nailers**

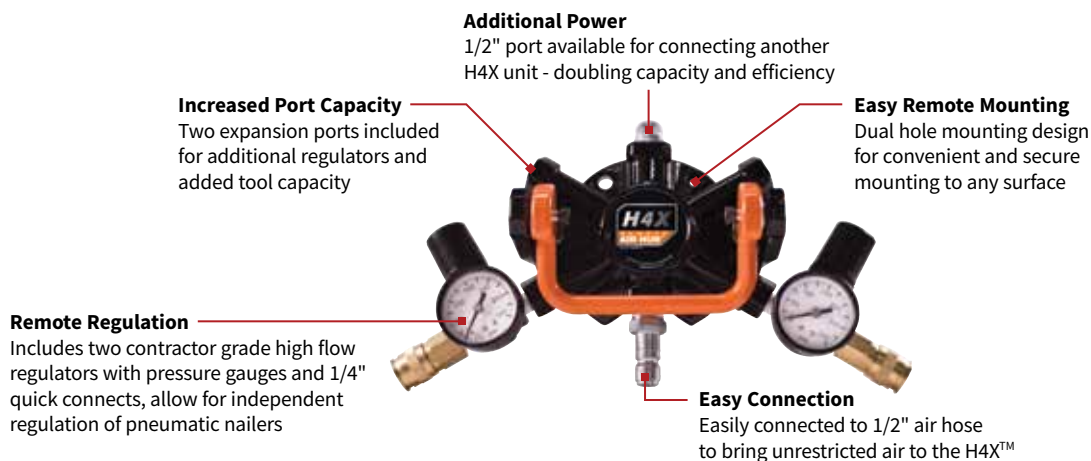

ITEM #	DESCRIPTION	RETAIL
041-0099IC	H4X Remote Hub	\$100





A GNE BRAND

LOG SPLITTERS



GNE

IRON & OAK

LOG SPLITTERS

HORIZONTAL

- 9" high wedge for big jobs
- High pressure hoses on both the pressure and return side
- Powder coat finish for optimum weather protection
- Heavy-duty steel fenders (excludes BHPCLS1513GC)
- Heavy-duty 4-bolt trailer hubs for towing
- 2" hitch coupler
- Fast Cycle model (BHH3013GXF) speeds up your splitting by more than 25%



BHH3013GX

ITEM #	ENGINE	SPLITTING FORCE	MAX LOG LENGTH	CYCLE TIME	HYDRAULIC TANK	PUMP	CYLINDER SIZE	WEIGHT	RETAIL
BHH2013GX	163 cc Honda GX160	20 Tons	25"	12 Sec.	9.5 Gallon	11 GPM	4" x 24"	630 lbs	\$2,599
BHH3013GX	270 cc Honda GX270	30 Tons	25"	16 Sec.	9.5 Gallon	16 GPM	5" x 24"	650 lbs	\$3,049
BHH3013GXF	270 cc Honda GX270	20 Tons	25"	8 Sec.	9.5 Gallon	16 GPM	4" x 24"	650 lbs	\$3,099

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
BR021270-KIT	4-Way Wedge	\$500
BR021186	Log Cradle (All Hardware Included)	\$150
BR012104	Safety Flag Kit	\$60
GNE-1100-CVR	Universal Log Splitter Cover (See more details on page 60.)	\$90

LOG SPLITTERS

VERTICAL/HORIZONTAL

- EZ lift hinge allows for a one-handed lift to vertical position
- Standard log dislodger helps eject any log that sticks to slide wedge and protects control valve and other hydraulic components
- Spring loaded vertical and horizontal rail locks
- High pressure hoses on both the pressure and return side
- Powder coat finish for optimum weather protection
- Heavy-duty steel fenders
- Heavy-duty crank down wheel jack for easy moving
- Heavy-duty 4-bolt trailer hubs, 2 x 3 tube tongue and 2" hitch coupler for towing
- Maximum towing speed of 35 mph (except BHVH3716GX)
- Maximum towing speed of 45 MPH on unpaved roads or 55 MPH on paved roads (BHVH3716GX only)
- **Torsion axle model available (BHVH2616GXT)**



ITEM #	ENGINE	SPLITTING FORCE	MAX LOG LENGTH	CYCLE TIME	HYDRAULIC TANK	PUMP	CYLINDER SIZE	WEIGHT	RETAIL
BHVH2216GX	163cc Honda OHV	22 Tons	25"	12 Sec.	9.5 Gallon	11 GPM	4" x 24"	660 lbs	\$2,549
BHVH2616GX	270cc Honda OHV	26 Tons	25"	12 Sec.	9.5 Gallon	16 GPM	4.5" x 24"	700 lbs	\$2,999
BHVH2616GXT	270cc Honda OHV	26 Tons	25"	12 Sec.	9.5 Gallon	16 GPM	4.5" x 24"	700 lbs	\$3,499
BHVH3716GX	270cc Honda OHV	37 Tons	24"	14 Sec.	12 Gallon	16 GPM	5" x 24"	725 lbs	\$4,699

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
BR021175	4-Way Wedge* - Fits BHVH2216GX, BHVH2616GX	\$200
BR021248	Engine Guard - Fits BHVH2216GX, BHVH2616GX, BHVH2616GXT	\$40
BR021186	Log Cradle (All Hardware Included) - Fits BHVH2216GX, BHVH2616GX, BHVH2616GXT	\$150
BR021172-14	Log Dislodger (Replacement) - Fits BHVH2216, BHVH2616GX, BHVH2616GXT, BHVH3716GX	\$130
BR012104	Safety Flag Kit - Fits BHVH2216GX, BHVH2616GX, BHVH2616GXT	\$60
GNE-1100-CVR	Universal Log Splitter Cover (Fits most 22-37 ton log splitters.) (See more details on page 60.)	\$90

*Iron & Oak models manufactured in 2014 and earlier will require Item # BR021172-14 to use 4-Way Wedge.

NEW

LOG SPLITTERS VERTICAL/HORIZONTAL

- Auto latch system locks beam into the horizontal position for safe towing
- Enhanced handle to assist with transitioning unit between horizontal and vertical operating positions
- 4-stage hydraulic filtration system prevents damage to the hydraulic system by removing metal particles and other micro particles that can contaminate and damage the machine (components include suction strainer, return line filter, breather cap air filter and magnetic drain plug)
- Offset valve for better operator position
- Heavy-duty wedge design with five bolts per side
- Halite commercial cylinder seals
- Bolt-on dislodger and log cradle standard
- Improved engine mount
- Larger jack wheel makes it easier to move unit even on grass
- Tow cables included



ITEM #	ENGINE	SPLITTING FORCE	MAX LOG LENGTH	CYCLE TIME	HYDRAULIC TANK	HYDRAULIC CAPACITY	PUMP	CYLINDER SIZE	WEIGHT	RETAIL
BHVH2418GX	163cc Honda OHV	24 Tons	25"	13 Seconds	9 Gallons	10 Gallons	11 GPM	4" x 24"	675 lbs	\$2,699
BHVH3018GX	270cc Honda OHV	30 Tons	25"	12 Seconds	9 Gallons	10.5 Gallons	16 GPM	4.5" x 24"	705 lbs	\$3,199
BHVH3018GXT	270cc Honda OHV	30 Tons	25"	12 Seconds	9 Gallons	10.5 Gallons	16 GPM	4.5" x 24"	730 lbs	\$3,699



ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
797872	Engine Guard	\$99
797859	Light Kit	\$169

DUAL ACTION LOG SPLITTER HORIZONTAL

- Splits in both the forward and reverse stroke for a cycle time of just 7 seconds
- Convenient and easy to use control panel makes operation quick and easy
- Heavy-duty fenders protect tires from falling logs while splitting and road debris while towing
- Operator's manual tube provides easy, on-unit storage of important operating and safety instructions
- Powder coat finish for optimum weather protection
- Rigid axle



ITEM #	ENGINE	SPLITTING FORCE	MAX LOG LENGTH	CYCLE TIME	HYDRAULIC TANK	PUMP	CYLINDER SIZE	WEIGHT	RETAIL
BH2W2016GX	163 cc Honda GX160	20 Tons	24"	7 Sec.	12 Gallon	11 GPM	4" x 24"	607 lbs	\$2,699

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
GNE-1100-CVR	Universal Log Splitter Cover (See more details on page 60.)	\$90

COMMERCIAL LOG SPLITTER HORIZONTAL

- Designed for high volume firewood processing
- 12" H x 20" W wedge
- 4-way wedge saves time and adjusts up or down hydraulically so you can adjust to different types of logs for an even split
- Ergonomic design for maximum efficiency while operating
- Factory tested major components and hydraulic tank
- Powder coat finish for optimum weather protection
- Comes standard with hydraulic fluid
- Highway rated 4.80 x 12 tires
- **Optional log catcher kit (see accessories below)**



POWERED by
HONDA



ITEM #	ENGINE	SPLITTING FORCE	MAX LOG LENGTH	CYCLE TIME	HYDRAULIC TANK	PUMP	CYLINDER SIZE	WEIGHT	RETAIL
BHH4013GX30	389cc Honda	30 Tons	25"	12 Sec.	15 Gallon	22 GPM	5" x 24"	1,338 lbs	\$7,999

COMMERCIAL LOG SPLITTER ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
BR021185	Log Catcher Kit	\$500
BR012104	Safety Flag Kit	\$60

TRACTOR MOUNT LOG SPLITTER HORIZONTAL

- Tractor mounted log splitter is designed for tough applications in horizontal, grounded and elevated positions
- 6" high carbon steel wedge
- Powder coat finish for optimum weather protection
- Fits Category 1, 2 and 3 tractor hitches
- 3-position valve with auto return



**Shown with optional log cradle*

ITEM #	SPLITTING FORCE	MAX LOG LENGTH	CYLINDER SIZE	WEIGHT	RETAIL
TMH13HYD	*Up to 20 Tons	25"	4" x 24"	393 lbs	\$1,399

**Dependent on tractor's hydraulic pressure*

TRACTOR MOUNT LOG SPLITTER ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
TMH 10' HOSE KIT	10' Hydraulic Hose Kit	\$119
BR021186	Log Cradle (All Hardware Included)	\$150
BR026003SA	PTO Kit	\$1,000

Jrco

Heavy-duty Attachments
for Commercial Mowers

A GNE BRAND

AERATORS

BLOWER BUGGY

BROADCAST SPREADERS

LAWN ROLLERS

LEAF BLADE PLOW

SPRAYERS

TINE RAKE DETHATCHERS



GNE

JRCO

TINE RAKE DETHATCHER THE ULTIMATE SPRING CLEAN-UP TOOL

- Use the tine rake dethatcher throughout the growing season as a tool to control thatch accumulation and reduce the chance of turf disease
- Seasonal uses:
 - Spring** – Use for first mowing to remove thatch, embedded leaves and debris
 - Summer** – Use to surface aerate the soil promoting root development and thicker turfgrass
- Use to rake in seed and accelerate germination
- Available with (473 Series) or without (471 Series) JRCO mount bar package

**FLEXIBLE TINES ALLOW ZERO-TURN CAPABILITY
WITHOUT DAMAGING TURFGRASS**



**TUNE-UP KITS
AVAILABLE!**

SERIES	DESCRIPTION	MOUNT BAR	WEIGHT	RETAIL
473	36" Width, Front-Mount	Included*	76 lbs	\$595
471	36" Width, Front-Mount	Sold Separately**	62 lbs	\$490
473	46" Width, Front-Mount	Included*	84 lbs	\$595
471	46" Width, Front-Mount	Sold Separately**	70 lbs	\$527
473	60" Width, Front-Mount	Included*	98 lbs	\$660
471	60" Width, Front-Mount	Sold Separately**	84 lbs	\$555
473	60" Width, 3" Heavy-Duty Wheels	Included*	100 lbs	\$727
471	60" Width, 3" Heavy-Duty Wheels	Sold Separately**	86 lbs	\$622

*Please provide mower brand, model & deck size when ordering.

**Front-mount attachments use the same JRCO mount bar.

BROADCAST SPREADER ELECTRIC

- Ideal for spreading all types of granular and pelletized fertilizer, seed and ice-melting pellets
- Polyethylene hopper
- Electronic speed control accurately maintains spread pattern widths from 5-24 feet
- Made of corrosion-resistant materials, stainless steel and engineered plastics
- Heavy-duty, sealed, direct drive, 12-Volt electric motor
- Sealed, quick-disconnect electrical cables are included for hook-up
- Models 503/504 attach to JRCO mount bar with four clevis pins; JRCO mount bar package sold separately (see page 47)
- Optional side deflector available (Item # 7053)
- Optional stainless steel screen available (Item # 8436)
- Optional receiver hitch mounts (1-1/4" and 2") adaptor available for 504U



**ALSO FITS CLASSEN & RYAN'S
STAND-ON AERATORS**

ITEM #	DESCRIPTION	CAPACITY	WEIGHT	RETAIL
503	Foot Control for Mid-Mount Zero Turn Mowers	2.2 cu ft / 120 pounds	76 lbs	\$1,135
504	Push-Pull Cable Control for Walk-Behind, Out-Front and Stand-on Mowers	2.2 cu ft / 120 pounds	62 lbs	\$1,135
504U	Push-Pull Cable Control for Utility Vehicles	2.2 cu ft / 120 pounds	84 lbs	\$1,135

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
7053	Side Deflector Kit	\$112
8436	Stainless Steel Screen	\$76.50

HOOKER™ AERATOR FRONT MOUNT


- Six tine rotors
- Punctures up to six holes per sq ft
- Holes approximately 1/2" wide x 1-1/4" long and up to 3" deep
- Casters swivel allowing turning while aerating
- Six floating rotor heads independently lift over tree roots and rocks while the other heads continue to aerate
- Quickly attaches to JRCO mount bar with two clevis pins
- Electric actuator lifts the heads for transport
- **JRCO mount bar package sold separately (see page 47)**



SERIES	DESCRIPTION	AERATION WIDTH	MOUNT BAR	WEIGHT	RETAIL
751	38" Width, Front-Mount	66,000 sq ft/hour (at 5 mph)	Sold Separately	198 lbs	\$2,356


ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
15W	Deckless Aerator Mount for Walker Mower	\$385

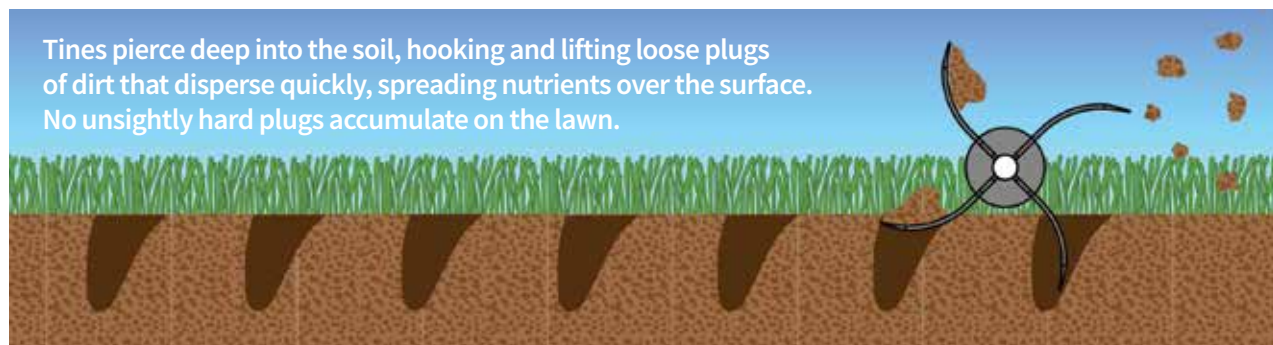

HOOKER™ AERATOR TOW-BEHIND

- Six floating rotor heads independently lift over tree roots and rocks while the other heads continue to aerate
- Punctures up to six holes per sq ft
- Holes approximately 1/2" wide x 1-1/4" long and up to 3" deep
- Comes complete with a two-point hitch, rigid frame and swiveling caster wheels that allow the aerator to track directly behind the tow vehicle
- Quickly attaches to JRCO hitch with two clevis pins
- Electric actuator lifts the heads for transport
- Model 753 has 6 tine rotors and is ideal for compact zero turn mowers
- Model 755 has 10 tine rotors and is ideal for utility vehicles, compact tractors and mowers

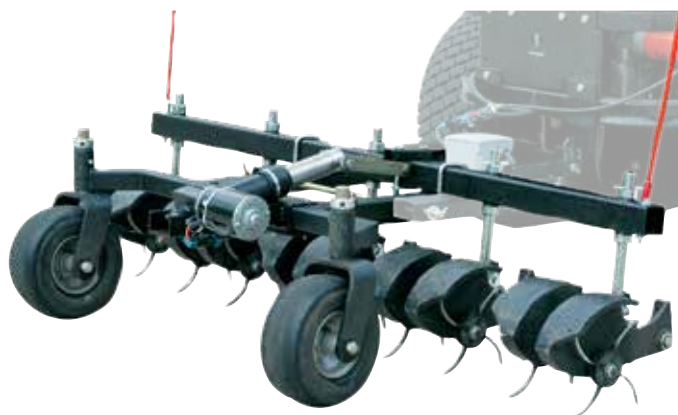


SERIES	DESCRIPTION	AERATION WIDTH	WEIGHT	RETAIL
753	38" Width, Tow-Behind (includes Hitch)	66,000 sq ft/hour (at 5 mph)	210 lbs	\$2,441
755	60" Width, Tow-Behind (includes Hitch)	105,000 sq ft/hour (at 5 mph)	270 lbs	\$4,027

LEAF BLADE PLOW

QUICKLY MOVES PILES OF LEAVES

- 55" wide plow for moving large piles of leaves
- Uses the mower's power to quickly move piles of leaves
- One-piece galvanized steel blade has supports at the top, center and bottom for durability
- Leaf blade rides on two adjustable caster wheels
- Flat 4-1/2" long stainless spring steel tines allow the plow to push leaves on uneven surfaces without damaging turfgrass
- Leaf blade may be folded up over the deck of many mowers to reduce space on the trailer
- **Quickly attaches to JRCO mount bar with two clevis pins; JRCO mount bar package sold separately (see page 47)**

**SAVE TIME & LABOR
ON FALL CLEAN-UP**

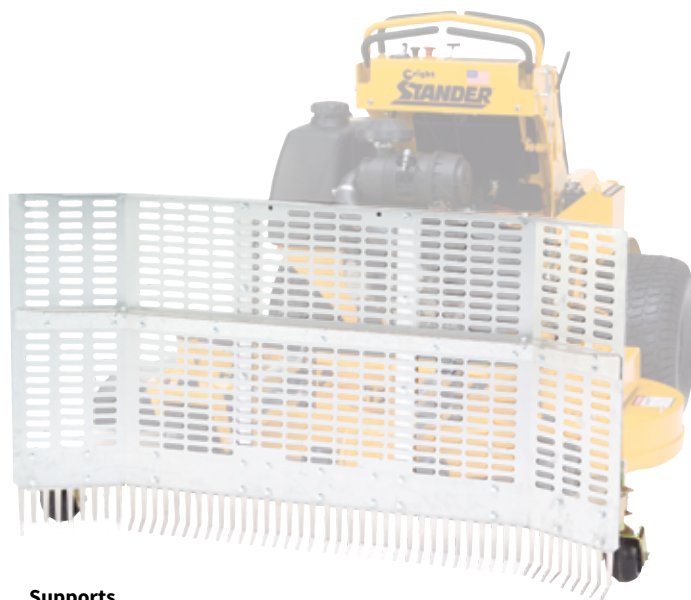

Galvanized Steel Blade

The 55" steel blade incorporates hemmed edge stiffeners and a folded top support




Stainless Steel Tines

Steel tines allow the plow to push leaves on uneven surfaces

Supports

Top and center supports strengthen the Leaf Blade Plow

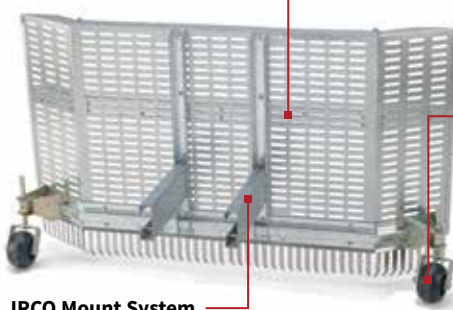

Caster Wheels

Swiveling caster guide wheels support the Leaf Blade Plow

JRCO Mount System

The Leaf Blade Plow attaches to the JRCO mount system with just two clevis pins and can be folded up over the deck of many mowers to reduce space on a trailer

SERIES	DESCRIPTION	WEIGHT	RETAIL
480	Leaf Blade Plow	70 lbs	\$487

BLOWER BUGGY CARRIER

FOR WALK-BEHIND BLOWERS

- Designed to hold walk-behind blowers on the front of zero-turn and riding mowers
- Moves yard debris with speed and ease while riding on the buggy's heavy-duty tubular steel frame
- Buggy adjusts to fit most walk-behind blowers
- Blower secures to buggy with three straps
- One person can quickly load or unload
- Two front caster wheels provide easy maneuverability and are low profile for optimum operation
- **Quickly attaches to JRCO mount bar with two clevis pins; JRCO mount bar package sold separately (see page 47)**

**BLOW DEBRIS WITH
SPEED & EASE**



SERIES	DESCRIPTION	WEIGHT	RETAIL
601	Blower Buggy Carrier	75 lbs	\$546

NEW

SPOT SPRAYER WITH OPTIONAL WAND

- Spot spray weeds from the comfort of your mower
- Low profile design allows for good visibility
- 6-gallon capacity tank with single 145° anti-drip nozzle
- Weather resistant, momentary, low profile spray switch has 6' leadfor main nozzle operation, allows for an instant spray to make weed elimination efficient and comes with Velcro strips for mounting in a convenient location by the operator
- 1 GPM pump runs off the mower's 12-Volt battery supply at 10-20 PSI and is mounted behind front plate protecting it from damage; weather resistant connectors are included
- Optional 12' spray hose and trigger operated wand with an adjustable cone pattern (Model 300.JRCO); allows for spraying along edging or fence lines
- Attaches to JRCO mount bar package with just four clevis pins
- **JRCO mount bar package (see below) sold separately**
- 15.25" L x 22.5" W x 16.5" H



SERIES	DESCRIPTION	WEIGHT	RETAIL
300	Spot Sprayer with Wand & Hose	25 lbs	\$599
310	Spot Sprayer without Wand & Hose	20 lbs	\$499

TRANSPORTER USE YOUR MOWER AS A POWERED WHEELBARROW

- Uses the mower's power to transport landscape materials, grass or leaf clippings, lawn debris or landscape equipment
- Tray can be positioned for maximum visibility and easy dumping
- Great for storing a grasscatcher when trailering the mower
- 20" W x 30" L x 3" H tray
- **JRCO mount bar package (see below) and tub (see right) sold separately**



**EASY TO USE & VERSATILE TO USE
STORE GRASS CLIPPINGS OR
USE AS WHEELBARROW**




SERIES	DESCRIPTION	WEIGHT	RETAIL
490	Transporter Tray	38 lbs	\$202

TRANSPORTER ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
6075	56 Gallon Tub (7.5 cu ft capacity)	\$135
490HDK	Heat Deflector Kit	\$23.50

JRCO MOUNT BAR PACKAGE

ITEM #	DESCRIPTION	RETAIL
MOUNT	JRCO Mount Bar Package (Required for all front mount attachments. One mount bar needed per mower make/model. includes all hardware and brackets for specific mower model.)	\$122



SPIKE AERATORS

TOW BEHIND

- For sandy soils and smaller lawns
- Easily attach to your riding lawn mower
- Welded steel tines
- Utilize spikes to slice holes in the turf, pushing the soil aside to allow oxygen, water and nutrients to reach grass roots
- Turf heals more quickly
- No plugs of grass and dirt left behind
- Rotate tow bar to lower the drum for aeration or raise the drum for transport
- 410/350-4, 2-ply tires (for transport only) with 1" greaseable ball bearings



MSAT48


**AERATORS AND
ROLLERS FROM MAXIM
NOW AVAILABLE
TO JRCO DEALERS**

ITEM #	AERATION WIDTH	TINE QUANTITY	SPIKE PENETRATION DEPTH	CAPACITY	WEIGHT	RETAIL
MSAT36	36"	78	2.75"	24 Gallons / 200 lbs	115 lbs	\$732
MSAT48	48"	102	2.75"	32 Gallons / 267 lbs	120 lbs	\$829
MSA3P48 (3-Point Hitch)	48"	102	2.75"	32 Gallons / 267 lbs	120 lbs	\$921

PLUG AERATORS

TOW BEHIND

- For clay soils and larger lawns
- Easily attach to your riding lawn mower
- Bolt-in spoons
- Utilize built-in spoons to remove plugs of soil from the turf to allow oxygen, water and nutrients to reach the grass roots
- Reduces soil compaction
- Encourages root growth
- Rotate tow bar to lower the drum for aeration or raise the drum for transport
- 410/350-4, 2-ply tires (for transport only) with 1" greaseable ball bearings

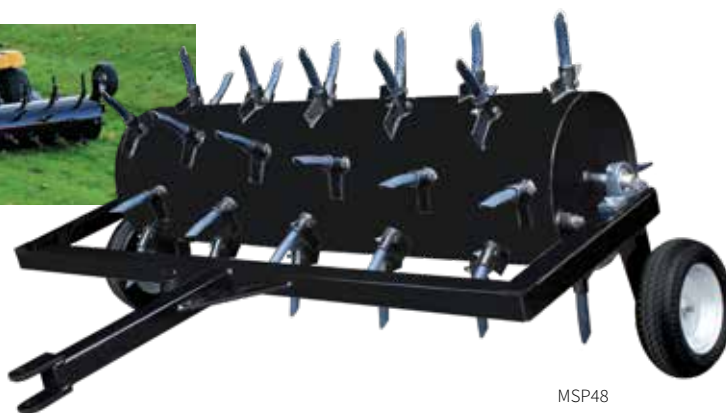

MSP48

ITEM #	AERATION WIDTH	TINE QUANTITY	PLUG PENETRATION DEPTH	CAPACITY	WEIGHT	RETAIL
MSP36	36"	36	4"	24 Gallons / 200 lbs	125 lbs	\$850
MSP48	48"	44	4"	32 Gallons / 267 lbs	135 lbs	\$970

LAWN ROLLERS

TOW BEHIND

- Smoothen out rough soil for sodding, seeding and lawn preparation
- Minimize unlevel lawn for playing and mowing
- Easily attach to your riding lawn mower with pin type hitch
- Tank can be filled with water for added weight
- Rotate tow bar to lower the drum for rolling or raise the drum for transport
- Wheels are bolted in place with no pins or latches to rotate the tow bar 180° while lowering or lifting the drum
- 410/350-4, 2-ply tires (for transport only) with 1" greaseable ball bearings



MLR48

ITEM #	WIDTH	CAPACITY	WEIGHT	RETAIL
MLR36	36"	24 Gallons / 200 lbs	115 lbs	\$492
MLR48	48"	32 Gallons / 267 lbs	120 lbs	\$552
MLR3P48 (3-Point Hitch)	48"	32 Gallons / 267 lbs	120 lbs	\$645



KINDLING CRACKER®

KINDLING SPLITTER



GNE

KINDLING CRACKER

KINDLING CRACKER®

THE SAFEST WAY TO CUT KINDLING

- Splits wood with less force than a standard axe
- No moving blade passing by your hands
- Pre-sharpened blade
- Patented design made of high-quality cast iron in Australia
- Bolt holes for permanent mounting
- See it in action at gnedi.com/kc

5 YEAR

LIMITED WARRANTY



ITEM #	INNER DIAMETER	HEIGHT	WEIGHT	RETAIL
BR1000	6.5"	12"	10 lbs	\$99



How Does it Work?

Place a piece of firewood inside the iron safety ring and strike with a blunt instrument such as a hammer, mallet or even another piece of wood. This drives the wood down onto the splitting wedge for a quick, easy split.


PERFECT KINDLING FOR

Fireplaces, campfires, pizza ovens, wood stoves, saunas, barbecues, smokers and more!



A GNE BRAND

AERATORS
LAWN ROLLERS
PLOWS
SPRINKLERS
TILLERS
TRIMMERS

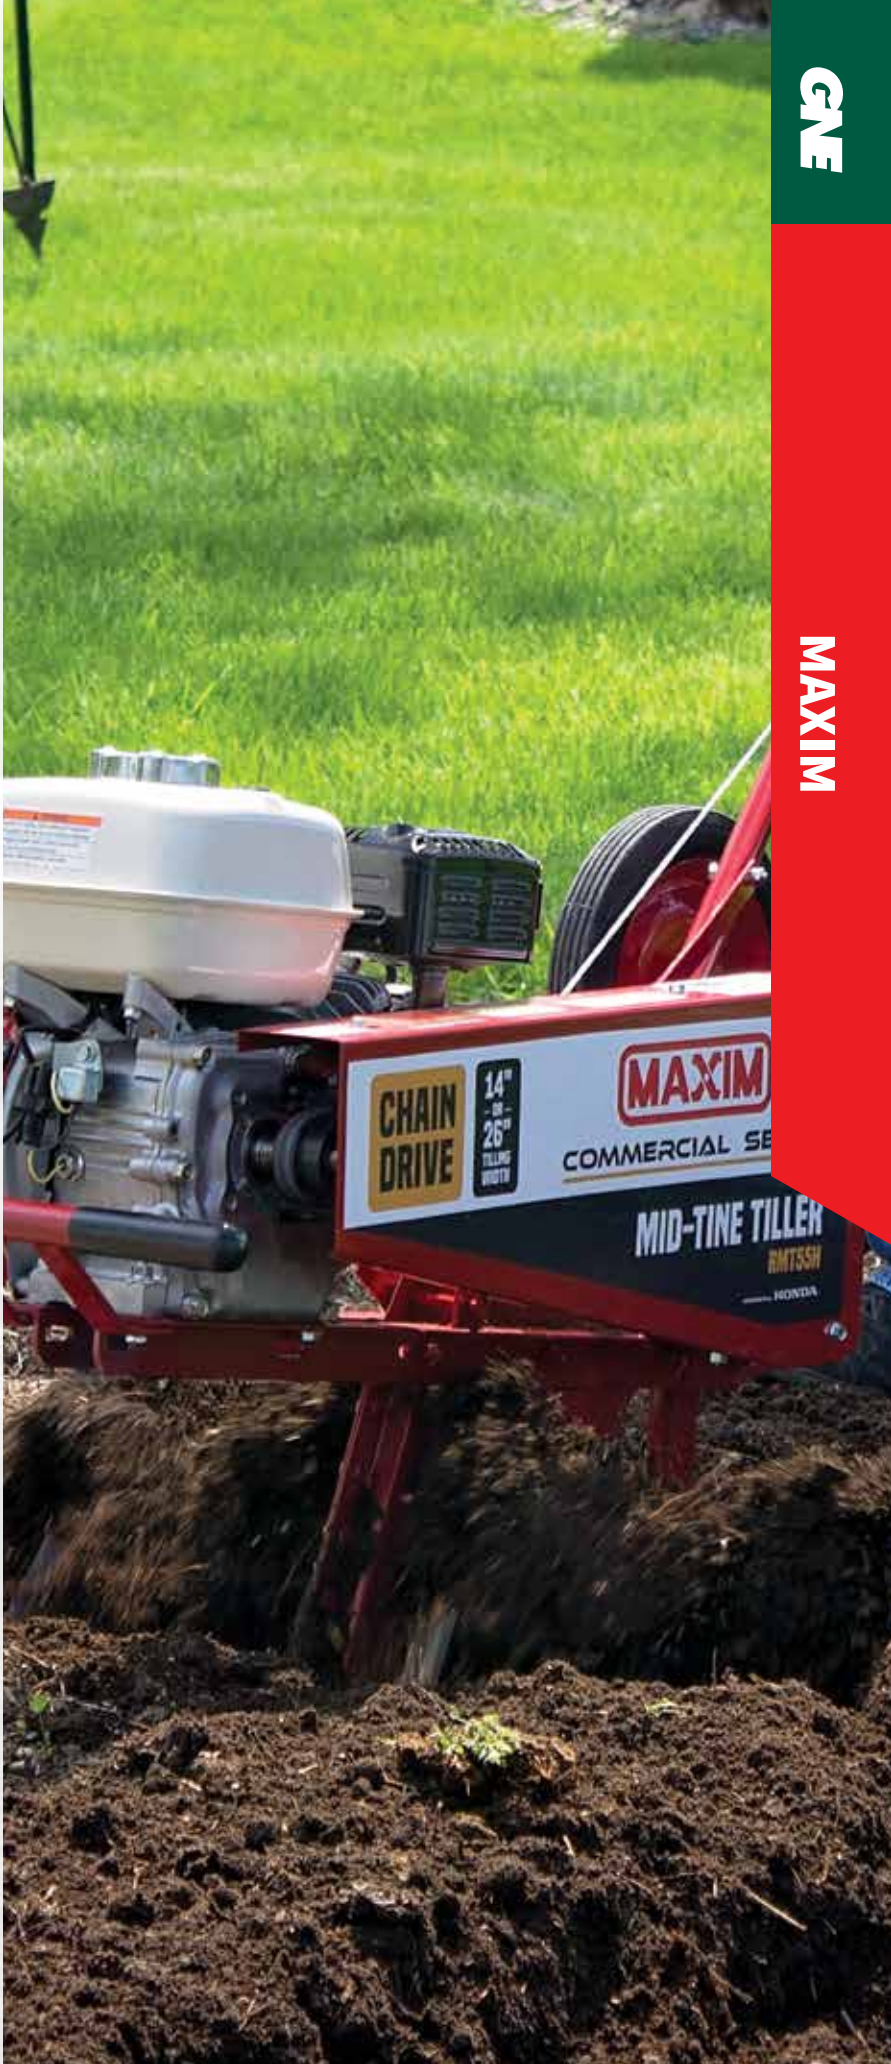

GNE

MAXIM



A GNE BRAND



TILLERS DESIGNED FOR THE HOMEOWNER – BUT BUILT FOR THE PROFESSIONAL

With Maxim's consumer tiller line you don't have to be a professional to own garden equipment that works and lasts. Knowing that all soil conditions and all gardeners are not alike, Maxim manufactures its tillers with options and the flexibility of a multitude of accessories.



MAXIMIZE YOUR TILLING



		MINI	MT SERIES	MT SERIES	HEAVY-DUTY
ITEM NUMBER		M30NB	MS50NB	MS50B	MT50B
RETAIL		\$716	\$747	\$899	\$1,199
ENGINE	Model	Briggs & Stratton 550 Series	Briggs & Stratton 550 Series	Briggs & Stratton 750 Series	Briggs & Stratton 750 Series
	Displacement	127 cc	127 cc	163 cc	163 cc
	Fuel Capacity	0.25 gallons	0.25 gallons	0.80 gallons	0.80 gallons
TILLING	Tines	Heat-Treated, Bolt-On Bolo Tines	Heat-Treated, Welded Slasher Tines	Heat-Treated, Welded Slasher Tines	Heat-Treated, Welded Slasher Tines
	Tine Speed	150 RPM	78 RPM	78 RPM	72 RPM
	Tilling Width	13" or 19"	14" or 26"	14" or 26"	14" or 26"
	Tilling Depth	Up to 8"	Up to 10"	Up to 10"	Up to 10"
	Drag Bar	Yes	Yes	Yes	Yes
	Hitch	Stamped	Stamped	Stamped	Precision Cast
TRANSMISSION	Type	Chain Drive	Chain Drive	Chain Drive	Chain Drive
HANDLES	Construction	1", 14 -gauge tubular steel	1", 14 -gauge tubular steel	1", 14 -gauge tubular steel	1", 14 -gauge tubular steel
FRAME	Dimensions	51" L x 23" W x 36" H	55" L x 26" W x 40" H	55" L x 26" W x 36" H	57" L x 24" W x 39" H
	Machine Weight	130 lbs	130 lbs	135 lbs	140 lbs
TIRES	Type	8 x 1.75 (for transport only)	8 x 1.75 (for transport only)	10 x 1.75 (for transport only)	10 x 1.75 (for transport only)
		2-year Non-Commercial Warranty	2-year Non-Commercial Warranty	2-year Non-Commercial Warranty	2-year Non-Commercial Warranty
WARRANTY		2-year Commercial Warranty on Weldments / 1-year Commercial Warranty on Gearcase	2-year Commercial Warranty on Weldments / 1-year Commercial Warranty on Gearcase	2-year Commercial Warranty on Weldments / 1-year Commercial Warranty on Gearcase	2-year Commercial Warranty on Weldments / 1-year Commercial Warranty on Gearcase

NEW MINI MAX TILLER/CULTIVATOR

- Till or cultivate with one machine
- Till hard soil to create new garden beds or prepare soil for planting by loosening and mixing soft soil for planting
- 6 durable, steel forged tines
- Heavy-duty transmission provides rugged power
- Transport wheels and drag stake are easily adjustable with no tools needed
- Convenient carrying handle that doubles as an engine guard



ITEM #	ENGINE	TILLING WIDTH	TILLING DEPTH	MAX TINE SPEED	WEIGHT	RETAIL
MTC35H	35cc Honda GX35	Up to 16"	Up to 6"	250 RPM	35 lbs	\$499

GNE

MAXIM

AVAILABLE NATIONWIDE

MAXIM[®]


A GNE BRAND



TILLERS DESIGNED FOR THE RENTAL INDUSTRY – WITHSTANDING HEAVY USE AND TRANSPORTATION BRUISES

Tillers in the rental industry must be able to withstand heavy use, rough handling and transportation bruises, yet still rent tomorrow. These beefy tillers combine ease of operation and maintenance with an extra sturdy design to make a tiller worthy of the Maxim name.

AVAILABLE NATIONWIDE

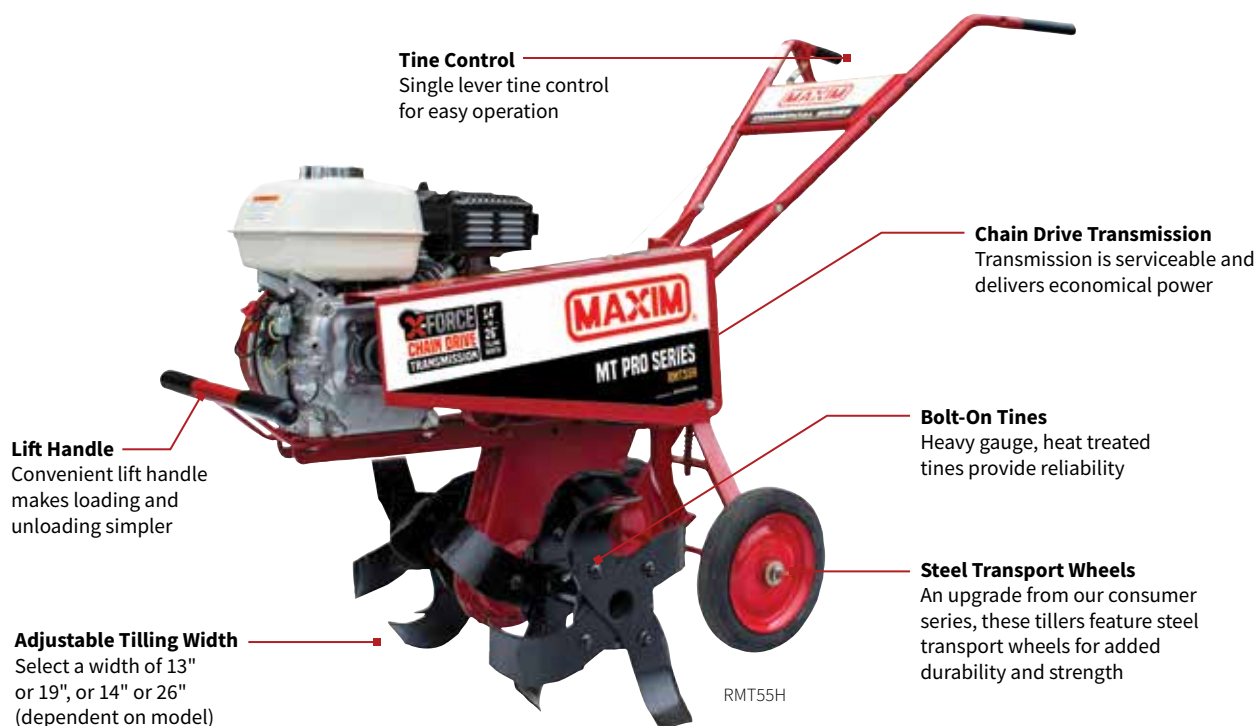

MAXIMIZE YOUR TILLING



		COMPACT	HEAVY-DUTY	HEAVY-DUTY
ITEM NUMBER		RM4H	RMT65BVG	RMT55H
RETAIL		\$1,199	\$1,299	\$1,399
ENGINE	Model	Honda GX120	Briggs & Stratton Vanguard™	Honda GX160
	Displacement	118 cc	205 cc	163 cc
	Fuel Capacity	0.53 gallons	0.83 gallons	0.83 gallons
TILLING	Tines	Heat-Treated, Bolt-On Bolo Tines	Heavy-Duty, Bolt-On Slasher Tines	Heavy-Duty, Bolt-On Slasher Tines
	Tine Speed	150 RPM	72 RPM	72 RPM
	Tilling Width	13" or 19"	14" or 26"	14" or 26"
	Tilling Depth	Up to 8"	Up to 10"	Up to 10"
	Drag Bar	Yes	Yes	Yes
	Hitch	Stamped	Precision Cast	Precision Cast
TRANSMISSION	Type	Chain Drive	Chain Drive	Chain Drive
HANDLES	Construction	1", 14 -gauge tubular steel	1", 12-gauge tubular steel	1", 12-gauge tubular steel
FRAME	Dimensions	55" L x 23" W x 36" H	61" L x 24" W x 39" H	61" L x 24" W x 39" H
	Machine Weight	110 lbs	146 lbs	147 lbs
TIRES	Type	10 x 1.75 (for transport only)	10 x 1.75 (for transport only)	10 x 1.75 (for transport only)
WARRANTY		2-year Non-Commercial Warranty	2-year Non-Commercial Warranty	2-year Non-Commercial Warranty
		2-year Commercial Warranty on Weldments /	2-year Commercial Warranty on Weldments /	2-year Commercial Warranty on Weldments /
		1-year Commercial Warranty on Gearcase	1-year Commercial Warranty on Gearcase	1-year Commercial Warranty on Gearcase



CHECK OUT OUR VIDEOS AT MAXIMMFG.COM

GNE

MAXIM

AVAILABLE NATIONWIDE

PLOW HOSS

PLOWS LIKE A MULE, WITHOUT THE KICK

- 205cc Briggs & Stratton engine
- 6:1 gear reduction
- 1", 14 gauge tubular steel handles
- 6-12 Super Sure Grip tractor lug
- Includes 7" turn-shovel, 12" sweep and 8" furrower
- Furrower makes rows, turn shovel builds up rows and sweep removes weeds
- 77" L X 26" W X 44" H

**PLOWS LIKE A MULE
WITHOUT THE KICK**



ITEM #	ENGINE	GEAR REDUCTION	WEIGHT	RETAIL
PH50B	127 cc Briggs & Stratton 550 Series	6:1	245 lbs	\$1,399

TILL 'N PLOW

WITH FULL ACCESSORY PACKAGE

- Serviceable, chain drive transmission
- Heat-treated slasher tines with replaceable bolt-on blades
- 72 RPM maximum tine speed
- Heavy-duty drag bar with spring loaded pin
- 1", 14-gauge tubular steel handles
- Includes A-frame cultivator, 8" furrower and 2 turn shovels
- Precision cast hitch with spring loaded pin
- 10 x 1.75 transport tires; 4.80 / 4.80 agricultural lug drive tires
- Tractor tires can be filled with water for improved traction
- Reverse option available

**MANY POSSIBILITIES
ONE PIECE OF EQUIPMENT**



ITEM #	ENGINE	TRANSMISSION	TILLING WIDTH	TILLING DEPTH	WEIGHT	RETAIL
TP50B	163 cc Briggs & Stratton 750 Series	Chain Drive	14" or 26"	Up to 10"	200 lbs	\$1,399



TINES

- Cut new ground for a garden
- Landscape your yard
- Till in soil amendments
- Create flower beds



CULTIVATOR

- Scratch out weeds
- Adjust working width
- Work on either side of small plants (with depth wheel removed)



FURROWER

- Makes rows
- Plow out tough weeds
- Use with depth wheel to plow at uniform level
- Adjust blade angle for soil conditions



TURN SHOVELS

- Hill potatoes or corn
- Push up dirt along rows
- Work both sides of small plants (with depth wheel removed)
- Work close to plants

HI-WHEEL PLOWS

VERSATILE, MINIMAL MAINTENANCE PLOW

- Perfect for smaller gardens
- Furrow, weed and plow your tilled soils
- Easy to push and maneuver
- Wood handle
- Includes furrower, turn shovel and 5-tine cultivator attachments




ITEM #	HANDLE LENGTH	WHEEL DIAMETER	WHEEL MATERIAL	WEIGHT	RETAIL
BHW-24	4.5'	24"	Steel	20 lbs	\$149

SPRINKLER STANDS

WELDED OR COLLAPSIBLE

- Available for 1/2" or 3/4" fittings
- Single hose connection
- Powder coated steel construction




ITEM #	STAND TYPE	SPRINKLER HEAD	CONNECTION SIZE	CONNECTION STYLE	HEIGHT	WEIGHT	RETAIL
140	Welded	No	1/2" NPT Male	Standard	36"	5.5 lbs	\$33
150	Collapsible	No	1/2" NPT Male	Standard	36"	5.5 lbs	\$38
190	Collapsible	No	3/4" NPT Male	Standard	42"	13.5 lbs	\$72
190BFC	Collapsible	Yes	3/4" NPT Male	Standard	42"	14 lbs	\$94

T-POST SPRINKLERS

WELDED OR COLLAPSIBLE

- Non-clog, corrosion-resistant brass sprinkler heads
- Available for 1/2" fittings
- Single hose connection
- Powder coated steel construction



ITEM #	SPRINKLER HEAD	CONNECTION SIZE	CONNECTION STYLE	WEIGHT	RETAIL
TP12	No	1/2" NPT Male	Standard	1.5 lbs	\$31
TP34H	Yes	1/2" NPT Male	Standard	3 lbs	\$72

TRIMMASTERS

FOR ROUGH CUTTING TO FINISH

- The power of a lawn mower, the versatility of a string trimmer
- Get close to fence rows, trees, landscaping and other hard to reach areas
- 3/4" shaft
- Side discharge shield
- 1", 14 gauge tubular steel handles
- Heavy-duty cutting cord
- Aluminum glide bowl
- 16" steel ball tires



ITEM #	ENGINE	CUTTING WIDTH	CUTTING HEIGHT	CUTTING CORD	WEIGHT	RETAIL
MBWT5B	190 cc Briggs & Stratton 625 Series	24"	1-7/8" & 3-3/4"	0.155" Diameter	95 lbs	\$639
MBWT5BN	190 cc Briggs & Stratton 625 Series	24"	1-7/8" & 3-3/4"	0.155" Diameter	95 lbs	\$660

SPIKE AERATORS

TOW BEHIND

- For sandy soils and smaller lawns
- Easily attach to your riding lawn mower
- Welded steel tines
- Utilize spikes to slice holes in the turf, pushing the soil aside to allow oxygen, water and nutrients to reach grass roots
- Turf heals more quickly
- No plugs of grass and dirt left behind
- Rotate tow bar to lower the drum for aeration or raise the drum for transport
- 410/350-4, 2-ply tires (for transport only) with 1" greaseable ball bearings



MSAT48

ITEM #	AERATION WIDTH	TINE QUANTITY	SPIKE PENETRATION DEPTH	CAPACITY	WEIGHT	RETAIL
MSAT36	36"	78	2.75"	24 Gallons / 200 lbs	115 lbs	\$732
MSAT48	48"	102	2.75"	32 Gallons / 267 lbs	120 lbs	\$829
MSA3P48 (3-Point Hitch)	48"	102	2.75"	32 Gallons / 267 lbs	120 lbs	\$921

PLUG AERATORS

TOW BEHIND

- For clay soils and larger lawns
- Easily attach to your riding lawn mower
- Bolt-in spoons
- Utilize built-in spoons to remove plugs of soil from the turf to allow oxygen, water and nutrients to reach the grass roots
- Reduces soil compaction
- Encourages root growth
- Rotate tow bar to lower the drum for aeration or raise the drum for transport
- 410/350-4, 2-ply tires (for transport only) with 1" greaseable ball bearings



MSP48

ITEM #	AERATION WIDTH	TINE QUANTITY	PLUG PENETRATION DEPTH	CAPACITY	WEIGHT	RETAIL
MSP36	36"	36	4"	24 Gallons / 200 lbs	125 lbs	\$850
MSP48	48"	44	4"	32 Gallons / 267 lbs	135 lbs	\$970

LAWN ROLLERS

TOW BEHIND

- Smoothen out rough soil for sodding, seeding and lawn preparation
- Minimize unlevel lawn for playing and mowing
- Easily attach to your riding lawn mower with pin type hitch
- Tank can be filled with water for added weight
- Rotate tow bar to lower the drum for rolling or raise the drum for transport
- Wheels are bolted in place with no pins or latches to rotate the tow bar 180° while lowering or lifting the drum
- 410/350-4, 2-ply tires (for transport only) with 1" greaseable ball bearings



MLR48

ITEM #	WIDTH	CAPACITY	WEIGHT	RETAIL
MLR36	36"	24 Gallons / 200 lbs	115 lbs	\$492
MLR48	48"	32 Gallons / 267 lbs	120 lbs	\$552
MLR3P48 (3-Point Hitch)	48"	32 Gallons / 267 lbs	120 lbs	\$645



GREASE & OIL
LOG SPLITTER COVER
METERS
PUMP ACCESSORIES



UNIVERSAL LOG SPLITTER COVER

PROTECT YOUR LOG SPLITTER

- PVC coated polyester material
- Elastic bottom hem
- Fits most 22-37 ton log splitters (horizontal position)
- Durable and water resistant, to keep your log splitter protected from even the harshest weather elements
- 8' L x 9' W x 3' H



ITEM #	DESCRIPTION	RETAIL
GNE-1100-CVR	Universal Log Splitter Cover	\$90

METERS

FROM GDI

- Fully epoxy encapsulated making them extremely resistant to moisture, heat, and vibration
- Utilize a polarized display, which makes gauges easy to read even in direct sunlight
- Easy 1-wire installation
- Hardware included



ITEM #	TYPE	DESCRIPTION	RETAIL
N111-0100-1005	Panel Mount Inductive Hour Meter & Tachometer	<ul style="list-style-type: none"> • Handles up to 7000 RPM for gas engines • Flash Alert™ flashes required maintenance at preset intervals • Self-powered, keeps total run hours or RPM displayed at all times • Toggle button on front can be used to toggle between hour meter, resettable timers and Flash Alert™ service alarms 	\$40
NEW N110-0100-1031	Surface Mount Inductive Hour Meter & Tachometer	<ul style="list-style-type: none"> • Total run time hour meter counts in tenths to 9,999.9, then whole hours up to 99,999 • +/- .02% quartz accuracy / resolution 0.1 hours • Inductive tachometer for 1 and 2 cylinder gasoline engines • Flash Alert™ flashes required maintenance at preset intervals • LCD display always lit 	\$50
N160-0200-1018	Surface Mount Hour Meter & Tachometer (Use for Diesel)	<ul style="list-style-type: none"> • Total run time hour meter counts in tenths to 9,999.9, then whole hours up to 99,999 • +/- .02% quartz accuracy / resolution 0.1 hours • For diesel engines, compressors, heating motors, process equipment, power equipment, generators and other types of equipment • LCD displays RPM while equipment is running; after equipment shuts off LCD displays accumulated hours 	\$70
NEW N430-0200-8111	NewGen LCD Hour Meter	<ul style="list-style-type: none"> • Configure as an hour meter, resettable timer, event counter, volt meter, or tachometer • LCD can display Flash Alert™ service alarms to remind the operator of required maintenance • Universal AC/DC input 	\$30
NEW N530-0200-8111	Hour Meter w/Retainer Clip	Call for more information.	\$30
NEW N830-0200-8111	Hour Meter w/Gasket	Call for more information.	\$30
NEW L1L-12-002V	Volt Meter	<ul style="list-style-type: none"> • 12 Volt Meter • Displays equipment's DC voltage level using a 10 segment LED bar graph display • Each bar represents one volt and corresponds to the printed voltage on the meter face • Termination: (2) 0.187 Faston tabs 	\$30

NEW

HAN-D-JAK

7000 LB CAPACITY

- Ideal for most trailers and other heavy lifts
- Supports up to 7000 lbs safely and securely
- Lifts almost any trailer with ease
- 15" screw travel with 14" additional adjustment (with jack pin height adjustment)
- Top-wind handle has smooth, ergonomic design for easy cranking
- All steel, bolt-on or weld-on square tube
- Corrosion-resistant exterior-grade black powder coat
- Includes foot pad for added stability support on soft ground
- Grease zerf fitting standard
- 23.5" retracted height; 52.5" extended height
- 4" to 33" lift range (29" of total travel)



ITEM #	DESCRIPTION	CAPACITY	RETAIL
1057.KMM	HAN-D-JAK	7000 lbs	\$150

ACCESSORIES

ITEM #	DESCRIPTION	RETAIL
58148.KMM	HAN-D-JAK Display	FREE*

*With purchase of 6 HAN-D-JAK's

LED WORK LIGHT

RECHARGEABLE & MAGNETIC

- Rechargeable magnetic base can provide up to 4 hours of use on a single charge (rechargeable, lithium ion battery)
- Use as handheld light or as a stand-alone light source to give yourself the brightest working environment possible
- 900 lumens
- 3.2 amp draw
- Metal handle for easy carrying
- Three lighting modes:
 - Hi Beam (100% intensity)
 - Low Beam (30% intensity)
 - Flash Mode (SOS pattern)
- Includes 110-Volt wall charger and 12- to 24-Volt car charger
- 3.25" W x 3.25" D x 7" H
- 1 year limited warranty



ITEM #	DESCRIPTION	RETAIL
TL2460.KMM	Rechargeable LED Magnetic Work Light	\$79



HYDRAULIC FLUID

FROM MAG 1®

- Maintains viscosity, even under higher operating temperatures, and has sufficient reserve of key additives, resulting in longer fluid life and reduced operating costs
- Reduced foaming ensures smooth, efficient operation and proper lubrication of all parts
- 2.5 gallon

ITEM #	RETAIL
10366.WAR	\$36



MOTOR OILS

FROM ACCEL®

- Reduced friction for excellent protection against engine wear and improved fuel economy
- High resistance to viscosity & thermal breakdown
- Fights volatility burn-off to minimize engine deposits and exhaust emissions
- 1 Quart

ITEM #	RETAIL
24001.WAR (5W-30)	\$3.99
24002.WAR (10W-30)	\$3.99



LITHIUM GREASE

FROM ACCEL®

- General purpose
- Formulated in high quality base oil
- Use for general applications
- 14 oz tube

ITEM #	RETAIL
32371.WAR	\$3.49

PUMP ACCESSORIES FROM APACHE



PVC HOSE KITS, SUCTION

- With male/female pipe threaded couplings



ITEM #	DIAMETER X LENGTH	WEIGHT	RETAIL
98128010	1.5" x 20'	9.8 lbs	\$54
98128040	2" x 20'	13.7 lbs	\$82
98128043*	2" x 20'	13.7 lbs	\$88
98128055	3" x 20'	27.0 lbs	\$159
98128056*	3" x 20'	27.0 lbs	\$161
98128059	4" x 20'	42.5 lbs	\$250

*With cam and groove couplers

MALE QUICK COUPLERS

- Cam and groove assembly
- Adapters mount directly to the pump which allows it to accept quick-coupler hoses



ITEM #	COUPLER TYPE	SIZE (INNER DIAMETER)	RETAIL
50400000	Male FNPT (A)	1.5"	\$5
50400010	Male FNPT (A)	2"	\$5
50400020	Male FNPT (A)	3"	\$9
50400030	Male FNPT (A)	4"	\$16

STRAINERS, STEEL



ITEM #	TYPE	RETAIL
70002780	2" Strainer	\$9
70002800	3" Strainer	\$26

SHORT SHANK GASKETS



ITEM #	SIZE (INNER DIAMETER)	RETAIL
43081292	2"	\$0.87
43081314	3"	\$1.33
43081349	4"	\$1.80

PVC HOSE KITS, DISCHARGE

- With male/female pipe threaded couplings



ITEM #	DIAMETER X LENGTH	WEIGHT	RETAIL
98138010	1.5" x 25'	4.2 lbs	\$34
98138043	2" x 25'	6.5 lbs	\$69
98138045	2" x 50'	10.2 lbs	\$62
98138063	3" x 25'	11.5 lbs	\$114
98138065	3" x 50'	19.5 lbs	\$123
98138075	4" x 50'	26.4 lbs	\$172

FEMALE QUICK COUPLERS

- Cam and groove assembly
- Adapters mount directly to the pump which allows it to accept quick-coupler hoses



ITEM #	COUPLER TYPE	SIZE (INNER DIAMETER)	RETAIL
50400040	Female MNPT (B)	1.5"	\$11
50400050	Female MNPT (B)	2"	\$12
50400060	Female MNPT (B)	3"	\$18
50400070	Female MNPT (B)	4"	\$29

STRAINERS, POLYPROPYLENE



ITEM #	TYPE	RETAIL
70000504	2" Round Holes	\$23
70001500	3" Round Holes	\$30
70009706	3" Square Holes	\$34

PIN LUG SPANNER WRENCHES



ITEM #	SIZE (INNER DIAMETER)	RETAIL
43106007	2"	\$11
43107003	3"	\$14
43107518	4"	\$14

TERMS & POLICIES

OF GNE

See complete terms and policies under:
Customer Support > Customer Setup Form at gnedi.com

GNE

TERMS & POLICIES

PAYMENT TERMS

- Customers that qualify for credit are given terms of 1% 10 NET 30 unless otherwise stated in seasonal programs. Customers that do not qualify for open credit will be set up as credit card only.
- Credit card payments are excluded from early payment discounts.
- Past due outstanding invoices may be charged 1.5% interest monthly.
- Great Northern Equipment (GNE) accepts cash, check, Visa, MasterCard, Discover Card, American Express, Paypal, money orders, bank wire transfer and ACH electronic transfer payments. Credit card charges over \$25,000 must be approved on a case by case basis.
- International shipments required prepayment via wire transfer.
- A \$30.00 bank fee will be applied to all NSF checks.
- Past due accounts will be placed on credit hold until account is paid to current. Past due accounts over 60 days may lose credit terms or have their credit limit restricted with GNE. Prepayment or credit card payment may be required on future orders.
- Invoices for all orders will be distributed electronically via e-mail the following business day.
- GNE reserves the right to change/correct payment terms without prior notice.
- For more information, call to request the GNE Accounts Receivable policy.

PRICING

- Prices are subject to change without notice.
- GNE reserves the right to correct pricing errors on any/all print/electronic media.
- The prices printed in this catalog are the manufacturers' suggested retail prices. Your price will vary, depending upon purchase volume and freight.
- Contact GNE to determine your discount from retail price. Possession of a GNE catalog does not constitute a right to buy.

SHIPPING

- Unless a preference is indicated on the purchase order, orders will be shipped best way.
- If GNE is unable to fill an entire order, partial shipment will be made unless "Ship Complete" is indicated on the purchase order.
- Customer will calls are invited with a minimum 4 hour notice provided. Hours are 8 a.m. to 4:30 p.m. If possible, please notify sales of pick-up date at time of order placement.
- If will call product is not picked up within 3 business days, the order will be canceled.

FREIGHT

- The customer is responsible for filing a freight claim with the freight carrier for any freight damaged product. Notify the carrier once open if damaged. We recommend noting on the freight bill any noticeable damage to carton or product. Save all packing and cartons for the carrier to inspect. This ensures proper freight claim handling.
- GNE must be notified of any product shortages within 24 hours of receipt
- Freight is FOB Rogers, MN
- Additional charges may apply for manufacturer direct shipments.
- Extraordinary delivery requirements may necessitate an additional shipping fee. Island, mountain and rural/remote location deliveries are subject to longer delivery times than stated above, additional fees and possible cancellation when outside our delivery zone.

RETURNS

- All returns must have a Sales Return Order number (SRO#) from Great Northern Equipment clearly marked on the exterior of the package or it will be refused. SRO#'s can be obtained by contacting a member of the Power Team.
- Parts returns are subject to a 20% restocking fee. Parts must be in original packaging.
- Returns of power equipment must be approved in advance, returned in new condition and will be subject to a restock fee.
- All special orders are non-cancelable, non-returnable and may be subject to a payment deposit.
- Special orders are non-cancelable and non-returnable.

INTERNET SALES

- Dealer shall not, directly or indirectly, sell any products by mail order or over the internet to geographies in which the dealer has no sales, installation and/or service personnel. Dealer shall sell the products only to customers located within the United States and that are located within the geographic area where the Dealer's sales force makes regular face-to-face visits with customers. The dealer's service staff shall set-up and instruct the user on the equipment (face-to-face), and provide after sale service and repairs. The customer must be located within a reasonable distance of the selling dealer's showroom. Please refer to product line specific rules and regulations prior to selling via the internet in your local dealer market.

CUSTOMER COMMUNICATION

- Customers are required to complete a customer set up form. GNE requires contact information for Accounts Payable and Purchasing before completion of customer setup.

BRAVE



DOSKO



Jrco
Heavy-duty Attachments
for Commercial Mowers

MAXIM

PERMA-WRAP
INDUSTRIAL FIBERGLASS WRAP



HOURS OF OPERATION

8 AM - 5 PM CST, MONDAY - FRIDAY

WILL CALL HOURS

8 AM - 4:30 PM CST, MONDAY - FRIDAY

Note: 4 hour minimum notice required

REMITTANCE ADDRESS

Great Northern Equipment
PO Box 860396
Minneapolis, MN 55486-0396

**For payments only.*



SERVING THE FOLLOWING INDUSTRIES:

AGRICULTURE, COMMERCIAL, HARDWARE, LAWN & GARDEN, RENTAL, SMALL ENGINE



GREAT NORTHERN EQUIPMENT

20195 South Diamond Lake Road, Suite 100
Rogers, MN 55374

TELEPHONE NUMBERS (TOLL-FREE / LOCAL)

Office Administration: (866) 297-5075 / (763) 428-3569

Customer Service: (800) 822-0295 / (763) 428-2237

Technical Support: (866) 297-4918 / (763) 428-6092

FAX NUMBERS (TOLL-FREE / LOCAL)

Main: (866) 779-9963 / (763) 428-4821

E-MAIL ADDRESS

Inside Sales: sales@gnedi.com

GNEDI.COM